


User Manual

SmartyCam 3 Sport
SmartyCam 3 Dual
Release 1.09



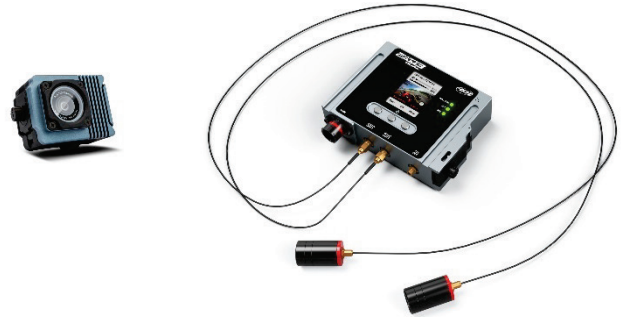

INDEX

1 – SmartyCam 3 preliminary notes	2
2 – SmartyCam 3 topics	3
3 – SmartyCam 3 connections	5
4 – SmartyCam 3 buttons, ON/OFF, powering and LEDs	8
4.1 – Pushbuttons	8
4.2 – Power ON/OFF	9
4.3 – LEDs working mode (SmartyCam 3 dual only)	10
5 – (Micro) SD card management	11
6 – SmartyCam 3 Start/Stop recording	12
7 – SmartyCam 3 Menu	13
7.1 – GPS Status	13
7.2 – Tracks	14
7.2.1 – Loading tracks to SmartyCam 3	15
7.2.2 – Managing tracks on SmartyCam 3	16
7.3 – Settings	17
7.3.1 – Auto Start Rec	17
7.3.2 – Auto Stop Rec	17
7.3.3 – Auto power off	17
7.3.4 – Export LOGS	17
7.3.5 – System time	17
7.3.6 – Exposure set	18
7.3.7 – Audio set	19
7.3.8 – Video Out (SmartyCam 3 Dual only)	20
7.3.9 – Rec Counter	20
7.3.10 – Overlay	20
7.3.11 – Clear tracks	20
7.3.12 – Flip over (SmartyCam 3 Sport only)	21
7.3.13 – Factory reset	21
7.3.14 – Info	22
7.4 – Update	22
7.4.1 – Firmup	23
7.4.2 – Tracks update	23
7.5 – Video file	24
8 – SmartyCam 3 and the PC	25
8.1 – Creating SmartyCam 3 configuration	25
8.1.1 – Configuring SmartyCam 3 overlay	26
8.1.2 – Logos & MAP and second camera Setting	28
8.1.3 – Configuring SmartyCam 3 parameters	29
8.1.4 – SmartyCam 3 connected to a master	30
8.1.5 – ECU Stream (SmartyCam 3 Dual only)	33
8.2 – Loading the configuration to SmartyCam 3	34
8.3 – Track Management	35
8.4 – Video Management	38
9 – Technical specifications and drawings	41

1 – SmartyCam 3 preliminary notes

This manual is intended to explain how to configure and use two versions of the new SmartyCam 3 action camera:

- SmartyCam 3 Sport



- SmartyCam 3 Dual



The two models are deeply different, and are intended for completely different applications, but share the same philosophy, configuration logic, operating system and all some internal components. In the following pages the explanations will be intended for both models, when not otherwise specified.



2 – SmartyCam 3 topics

Wide Global Shutter CMOS sensor

The best way to avoid wave effects when vibrations are strong.



Standard action camera


SMARTY CAM 3

Full HD image

1920 x 1080 resolution

SmartyCam 3 Sport records video at 30 fps

SmartyCam 3 Dual records video at 60 fps

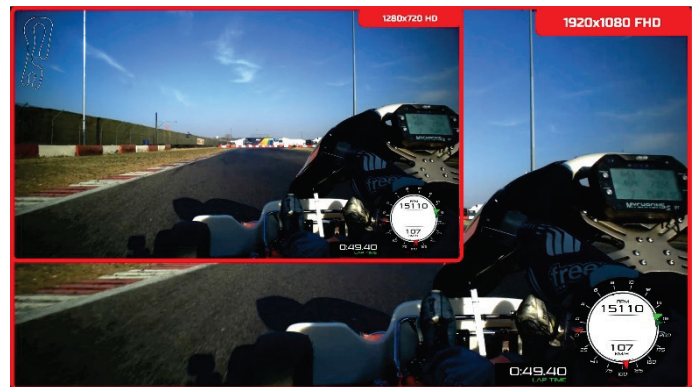

Completely waterproof

Designed for being used in the hardest environments: water, dust, temperatures are not a problem.

Sapphire frontal glass


The strongest glass for facing all high-speed impacts with pebbles, insects, dust that usually happen in a race.





A lot of graphic controls

Choose your preferred layout for keeping your data under control

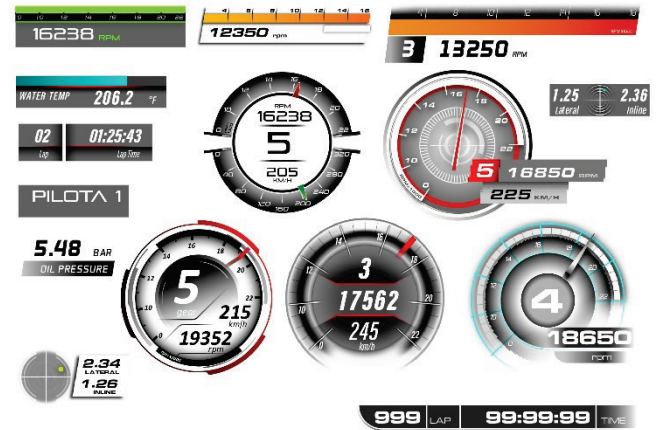

Secondary Camera (SmartyCam 3 Dual only)

Using Race Studio 3 software (supported from release 3.53.xx onward) you can place the video coming from the second camera where you prefer on the video, exactly as if you were adding any graphic control.



Auto start/stop recording

Avoid thinking at the camera while ready at the start/finish line.

Automatic track selection

SmartyCam 3 may work connected to an AiM Logger or in a standalone installation: in the first case, it receives the track selected by the logger, while in the second case it automatically selects the proper track using the information coming from the GPS Module. In this way, it can draw the map and calculate lap number, lap times and rolling times.

Video and data in the same file


Your video and the most important data in the same MP4 file.

Video Output (SmartyCam 3 Dual only)

SmartyCam 3 Dual features a Video output that can be connected to an external video streamer.


Automatic data and video synchronization

The data recorded in the MP4 file are only the data that the SmartyCam 3 receives: In case they are not enough for your analysis, simply import into Analysis 3 both the video file and the data from your AiM logger and the software will automatically synchronize them: position on the track, video frame and data on the graph will be perfectly correlated

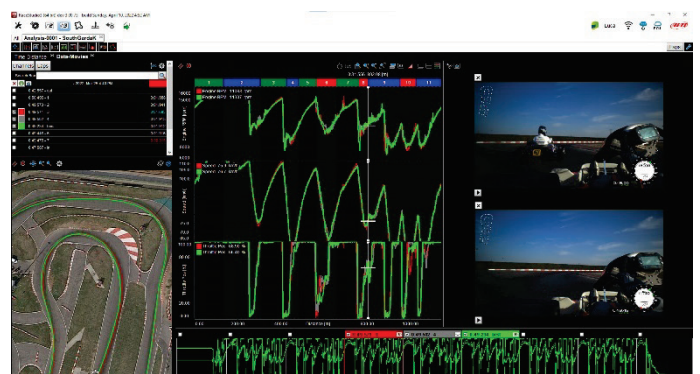


3 – SmartyCam 3 connections

SmartyCam 3 has an internal battery that may keep the system alive for a few minutes (around 20 min), so it is important to power it through an external 12 Volt battery, as shown in the pictures here down.



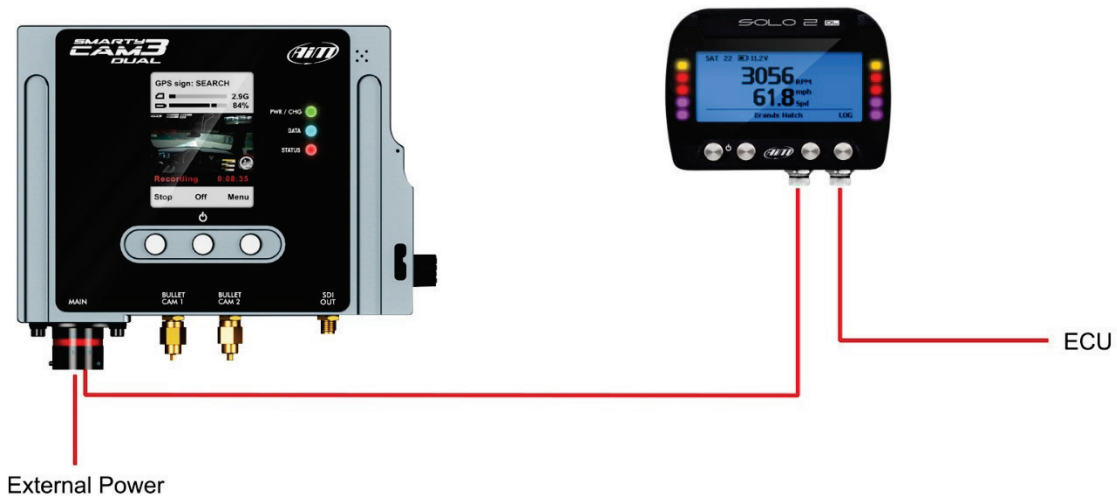


To connect SmartyCam 3 Sport to GPS Module (optional) use the 5 pins Binder 712 female connector you find back on the camera and connect it to the 2 ways Data Hub needed to power the camera.

To connect SmartyCam 3 Dual to GPS Module use the "EXP" cable of 22 pins Deutsch female connector harness.

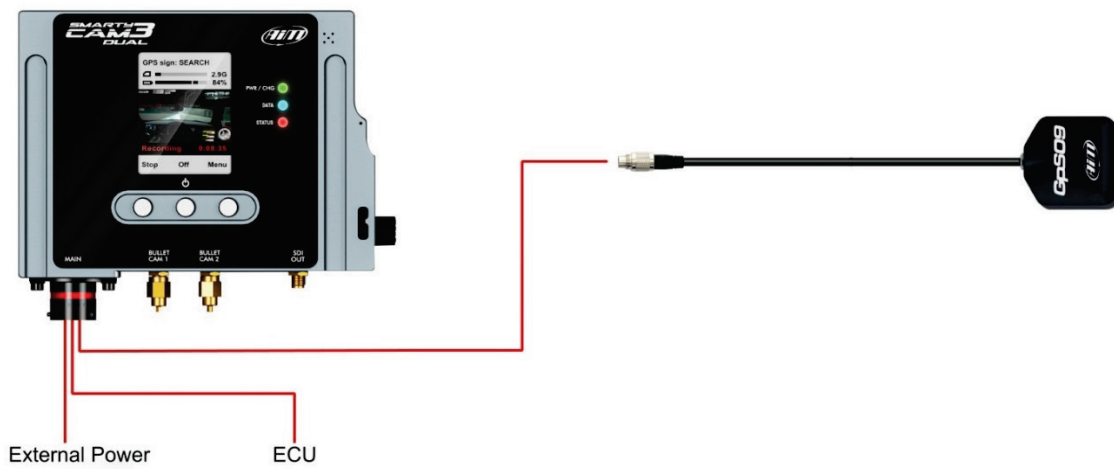

SmartyCam 3 can as well be connected to AiM Dashes and loggers through the AiM CAN network. The images below show some examples of connection.

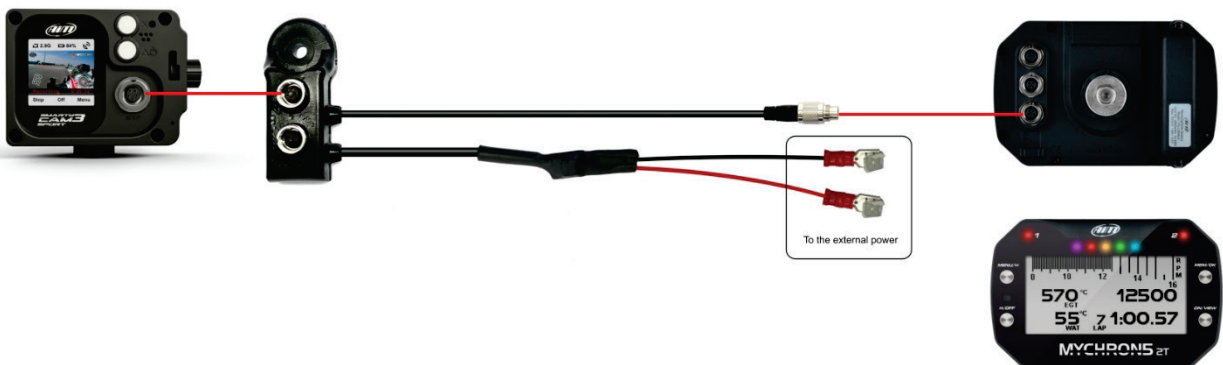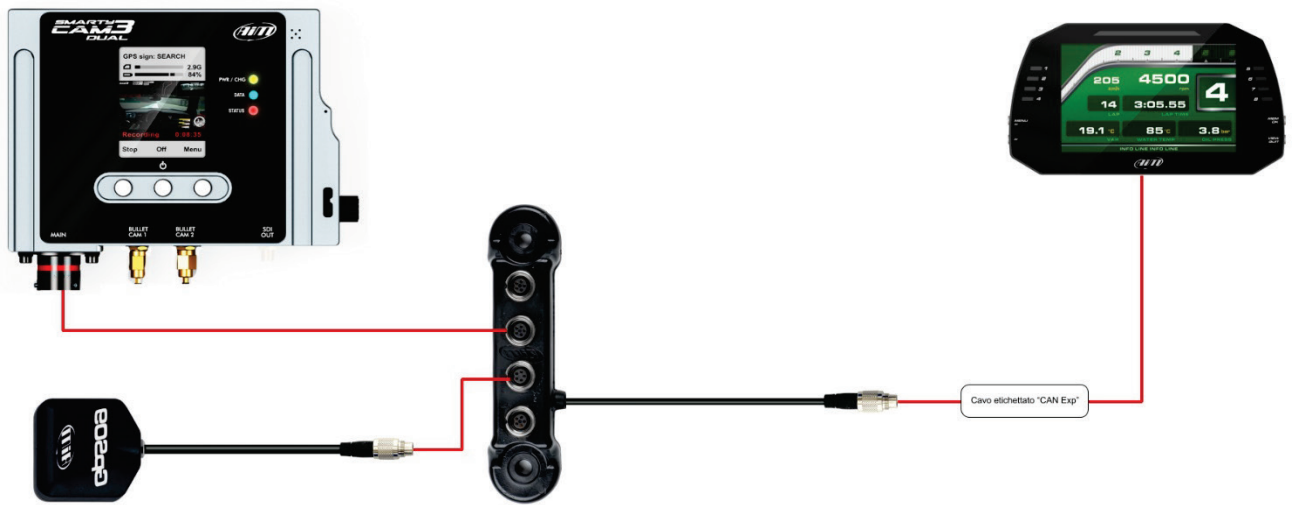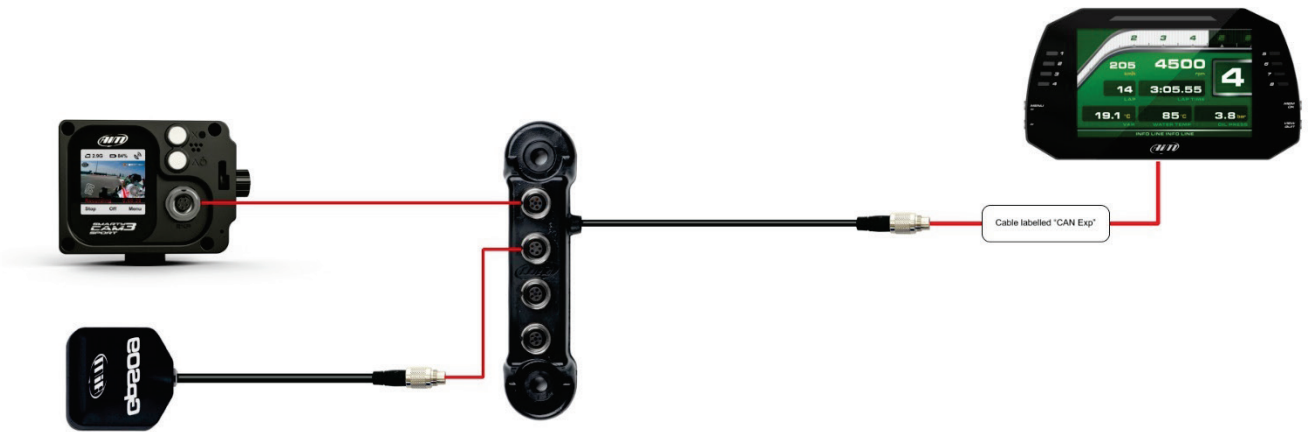

4 – SmartyCam 3 buttons, ON/OFF, powering and LEDs

4.1 – Pushbuttons

SmartyCam 3 Sport features two metal pushbuttons on its back, each of which manages two different features, in accordance to what shown in the display.



The upper pushbutton manages the features corresponding to these icons icons:

- "X": short pressure
- ●: long pressure

While the lower pushbutton manages the features corresponding to these icons icons:

- △: short pressure
- ⏻: long pressure to turn OFF

SmartyCam 3 Dual features three metal pushbuttons on its front: the central one switches on/off the camera. The two lateral buttons working mode is indicated by the menu written bottom in the display.



4.2 – Power ON/OFF

SmartyCam 3 Sport and SmartyCam 3 Dual need to be powered by an external power source to be connected:

- to the front Binder connector for SmartyCam 3 Sport
- to the 22 pins Deutsch male connector harness proper wires for SmartyCam 3 Dual

SmartyCam 3 powers ON when:

- You push the proper pushbutton
- An external power turns ON

SmartyCam 3 turns **automatically** OFF after the period of inactivity set in: "MENU>>SETTINGS>>AUTO POWER OFF.

Available options are:

- 5 min
- 15 min
- 30 min

To **manually** power on off SmartyCam 3 press the related button (🔌). The camera asks for confirmation.

4.3 – LEDs working mode (SmartyCam 3 dual only)

SmartyCam 3 dual features three front LEDs labelled as follows:

- PWR/CHN (Power/Charge) on top
- DATA central
- STATUS bottom

Their appearance change according to the message they are giving



PWR/CHG LED

- **Off:** external power not available
- **Blinking Red:** external power available and battery charging
- **Solid Red:** external power available and battery fully charged

DATA

This LED indicates the status of the connection of the two available CAN busses (CAN1 and CAN2) as follows:

- **OFF:** no data traffic, no Ethernet connection and no USB connection detected
- **Blinking Green:** non data traffic but ethernet connection detected
- **Blinking Blue:** non data traffic detected but USB connection
- **Blinking Cyan:** non data traffic detected but ethernet and USB connection detected
- **Solid Green:** data traffic available on CAN1 but not available on CAN2
- **Solid Blue:** data traffic available on CAN2 but not available on CAN1
- **Solid Cyan:** data traffic available on both CAN1 and CAN2
- **Solid Red:** mandatory data traffic is missing on either CAN1 or CAN2 interface: the failure status is determined by the current camera configuration

Please note: timeout condition on either CAN bus interface triggers after no data is continuously detected for 5 seconds

STATUS

- **Solid Red:** camera powered but unable to record data
- **Solid Blue:** camera ready to start recording
- **Solid Green:** camera currently recording

5 – (Micro) SD card management

SmartyCam 3 can support up to 2 TB cards. SmartyCam 3 Sport supports Micro SD only while SmartyCam 3 Dual supports SD. **For the (Micro) SD to correctly communicate with Race Studio 3 software you need to insert the card in SmartyCam 3 slot before inserting it in the PC slot.** The (Micro) SD is used not only to store video recorded by the camera but also to load the configuration and the firmware to the camera (see paragraph 6.4 for further information).

For both cameras the housing is closed by a plastic thumb screw. To open it press and turn the plastic thumb screw clockwise as written on the camera and shown here below. To close the door, firmly shut the flap and press in the thumbscrew then turn it counter clockwise. If SmartyCam 3 Sport is powered a steady red light is shown when the flap is open.



6 – SmartyCam 3 Start/Stop recording

SmartyCam 3 can start/stop recording manually or automatically.

When SmartyCam 3 is recording the display becomes red and switches off after a minute.

Manually Start Recording: please, simply press the "Rec" button. If you press it again, the SmartyCam 3 stops recording

Automatically Start Recording:

It is possible to enable the Automatic Start Recording, following this path:

- "MENU ->SETTINGS ->AUTO START REC ->".

In this case, the SmartyCam 3 starts and stops recording without any activity by the user. There are two different ways for managing this activity:

- The SmartyCam 3 is **connected to a Master**: it records the video when the master records the data.
- The SmartyCam 3 is in a StandAlone Installation: in this case you may define the conditions for starting and stopping the videorecording. This requires configuring the SmartyCam 3 parameters through the Configuration software Race Studio 3, as explained in the Chapter 8 "SmartyCam 3 and the PC"

--	--	--

To set automatic stop recording follow this path: "MENU ->SETTINGS ->AUTO STOP REC"

Available options are:

- "5 sec"
- "20 sec" (default)
- "1 min"
- "2 min"
- "5 min"

7 – SmartyCam 3 Menu


SmartyCam 3 settings can be changed using the pushbuttons. Pressing “MENU” this page shows up:

Available options are:

- **GPS STATUS**: status of the connected GPS
- **TRACKS**: to show the list
- **SETTINGS**
- **UPDATE**
- **VIDEO FILE**


In any situation use:

- “Down” (X) button to scroll the options
- “Sel” (Δ) to select and
- “Exit” (●) to quit and save

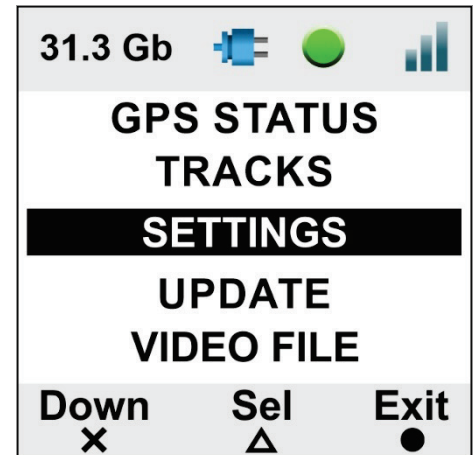

7.1 – GPS Status

Shows the number of connected satellites with the related signal level.

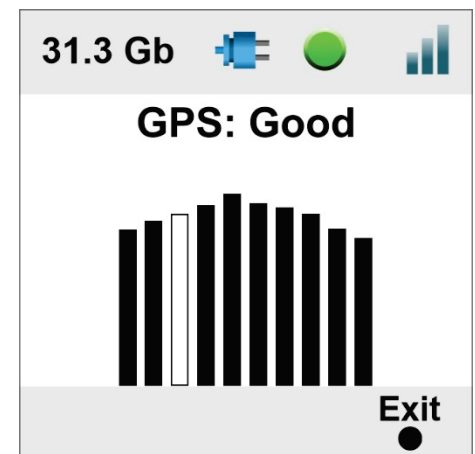

7.2 – Tracks


SmartyCam 3 can show the map of the circuit if loaded in its configuration (see paragraph 7.1.2 for further information) as well as the position of the vehicle on the track.



SmartyCam 3 can be installed in two ways:

- connected to an AiM logger, such as : MyChron5, Solo 2 DL, MX* logger, SW4, PDMs and EVOs; in this case the maps are loaded on AiM logger, that automatically selects the one you are racing on and transmits it to SmartyCam 3, that shows it in the video, in the position you defined during the configuration (please refer to paragraph 7.1.2 for further information).
- Connected to a GPS Module; in this last case you need to load the track maps directly to SmartyCam 3 using
 - the (Micro) SD
 - the Ethernet cable (**SmartyCam 3 Dual only**)




When you power ON the camera the first time, there are no tracks in its internal database. If it is connected to an AiM Logger, it will receive the tracks information from it, else you need to load the tracks, as explained here down.

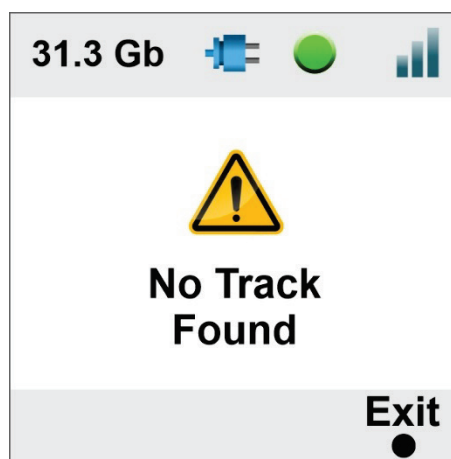

7.2.1 – Loading tracks to SmartyCam 3

To load tracks on SmartyCam 3 using the (Micro) SD card perform these operations:

- place the (Micro) SD in SmartyCam3 Sport and power it on – to properly format the card – and then in the PC slot
- run Race Studio3 software and load the tracks on the (Micro) SD (refer to paragraph 7.5 for further information)
- insert the (Micro) SD in SmartyCam 3 and follow this path: MENU -> UPDATE ->TRACKS
- press "Sel"
- in a few seconds SmartyCam 3 loads the tracks.

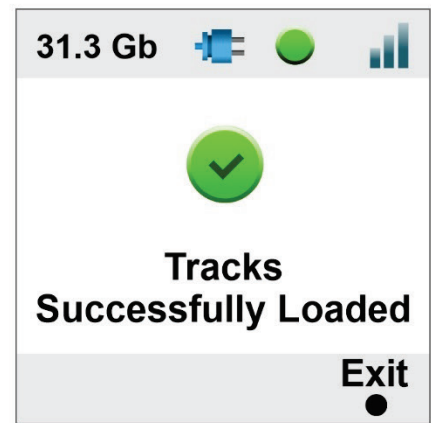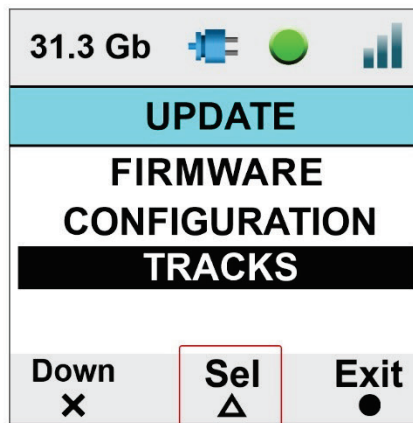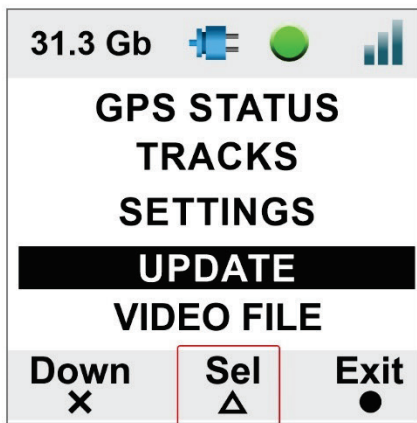

SmartyCam 3 Dual allows the user to load the track also using both the Ethernet cable included in standard+Ethernet and in Full harnesses or any USB-C cable; please perform these operations:

- with SmartyCam 3 Dual switched on and connected to the PC run Race Studio 3 software
- click "Track" Icon
- click on the SmartyCam 3 Dual you see bottom left of the software view
- select in the central column of the software view the tracks you want to load and drag and drop them to the right column where the tracks stored in SmartyCam are shown. Please refer to paragraph 7.5 for further information


7.2.2 – Managing tracks on SmartyCam 3

If SmartyCam 3 is not connected to any AiM logger but only to AiM GPS 09 Module track selection can be managed in two ways: automatic (default) and manual


In **AUTO** mode SmartyCam 3 recognizes and selects the map of the circuit you are racing on.

In **MANUAL** mode you need to select the track by yourself. To **manually set a track** on SmartyCam 3:

- press “Change” (Default setting is Auto)
- the track list is shown: locate your track
- press: “View”
- press “Sel”
- SmartyCam 3 shows a confirmation message

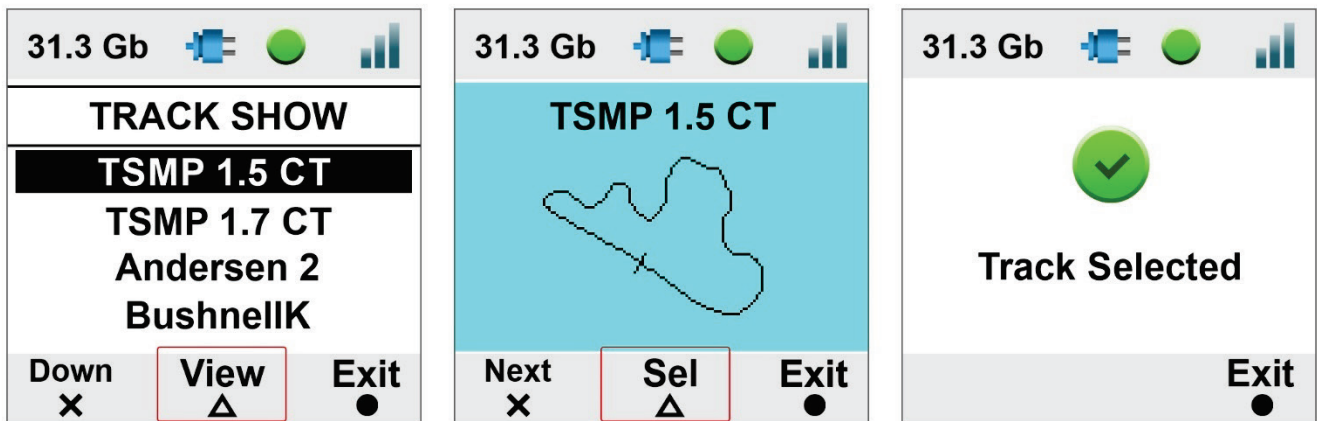

TRACKS Menu allows to **see a preview of the track** and the related information too. In “TRACK” menu scroll to “TRACK SHOW” and press “SEL”. This is very useful in case you need to select a specific track configuration among more configurations of the same track as shown here below.

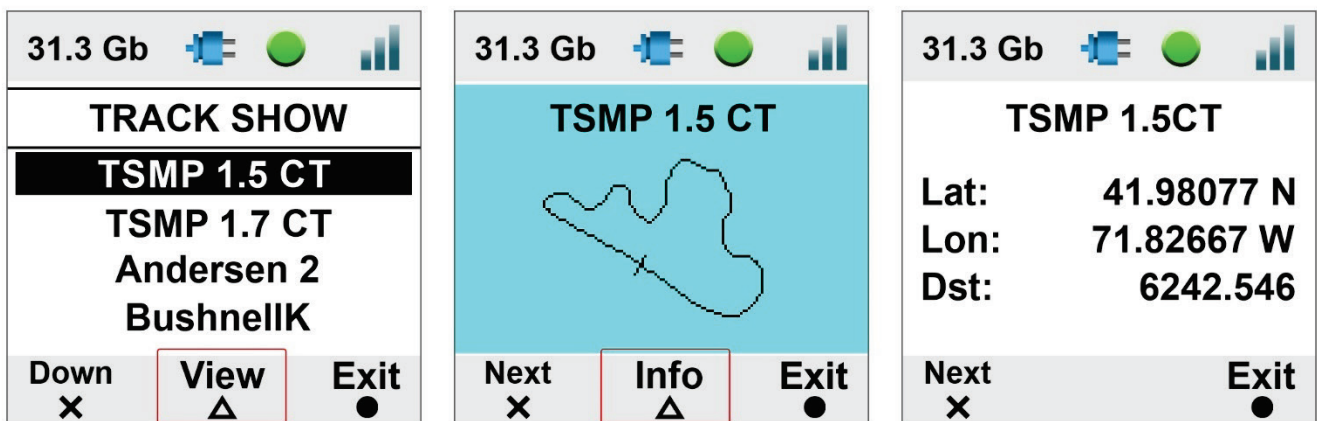



7.3 – Settings

Setting Menu is used to set:

- Auto Start Rec
- Auto Stop Rec
- Auto power off
- Export Logs
- System Time
- Exposure set
- Audio Set
- Video Output (SmartyCam 3 Dual only)
- Rec Counter
- Overlay
- Clear Tracks
- Flip over (SmartyCam 3 Sport only)
- Factory Reset
- Info

7.3.1 – Auto Start Rec

SmartyCam 3 is enabled for automatically starting and stopping the video recording. This happens in two different ways:

- if connected to an AiM Logger it starts/stops recording when the logger starts/stops recording
- if connected to a GPS 09 Module it starts recording according to the conditions set in its configuration. As default, it starts recording when the speed is greater than 10 km/h

7.3.2 – Auto Stop Rec

Auto stop recording feature sets a delay that the SmartyCam 3 respects before closing the mp4 file, when the recording conditions are no longer met.

7.3.3 – Auto power off

SmartyCam 3 turns automatically OFF after a time period, here defined, during which no function is used.

7.3.4 – Export LOGS

When SmartyCam3 is on it creates a LOG FILE containing all the information that can help understanding possible problems. This file records all information from the switch on and keeps about a month time memory. In case you need help from AiM Support team, please, export the LOG file to the (Micro) SD and send it to the team.

7.3.5 – System time

SmartyCam 3 has an internal clock powered by a battery and constantly updated by the external GPS 09 Module. Please note that both Time Zone and Saving Time Zone are considered and automatically corrected.




In this Menu Voice you may define different date/time formats:

- 0-12 or 0-24
- DD/MM/YYYY or MM/DD/YYYY

7.3.6 – Exposure set

This option allows to set the part of the shot to be used as reference. As shown in the images below:

- use “Change” button to modify the area to be used for adjusting the light. It is shown through a red rectangle. Please, select the whole frame (right image below) in case of installations in open cockpits.
- use “Exit” button to save and exit

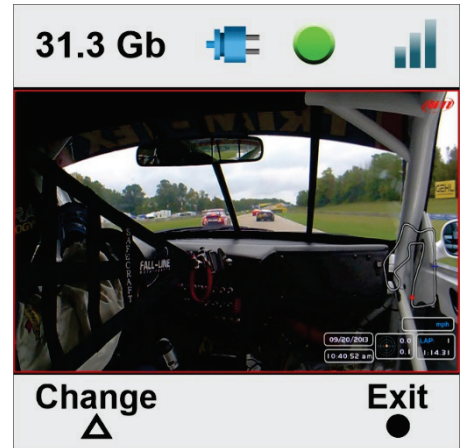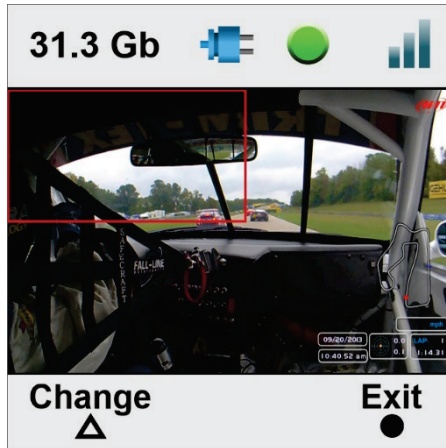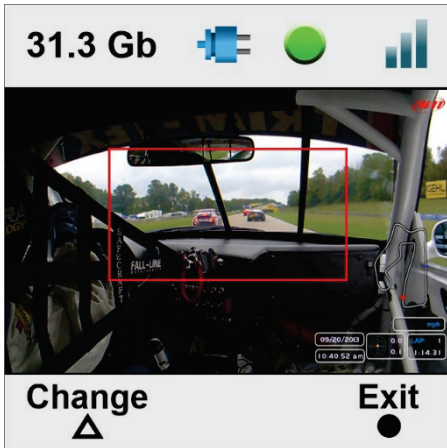


SmartyCam 3 Dual has two bullet cameras: you may select the one for which you like to set the exposure.




7.3.7 – Audio set

SmartyCam 3 comes with an internal microphone. To set it.

- Use “Change” button to set the gain
- Use “Exit” button to save and exit

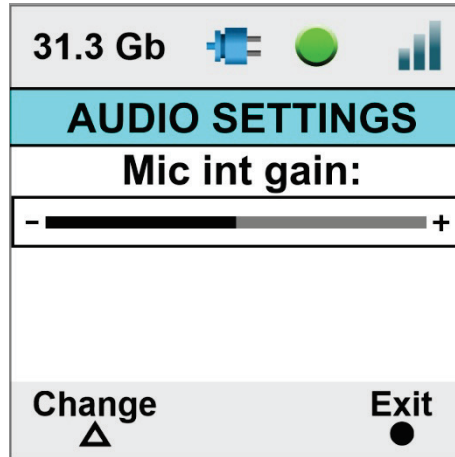


SmartyCam 3 Dual supports an external microphone too as shown here below. To connect it you need SmartyCam 3 Dual full harness. This harness can support any microphone that features a 3.5mm jack male connector.

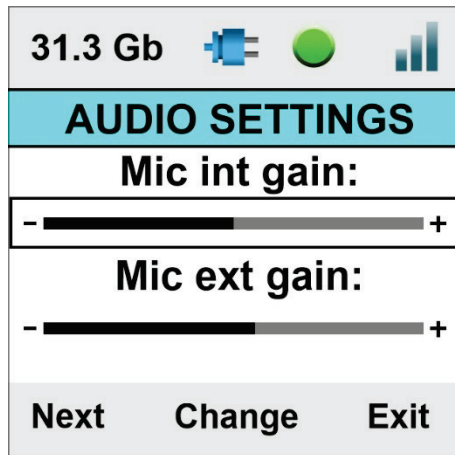

7.3.8 – Video Out (SmartyCam 3 Dual only)

SmartyCam 3 Dual features a video output that can be SDI or Display port. It allows to send the video/audio stream to a streamer at 30 or 60 fps to perform a video streaming. Available options are:

- disable
- 1080p 30fps
- 1080p 60fps

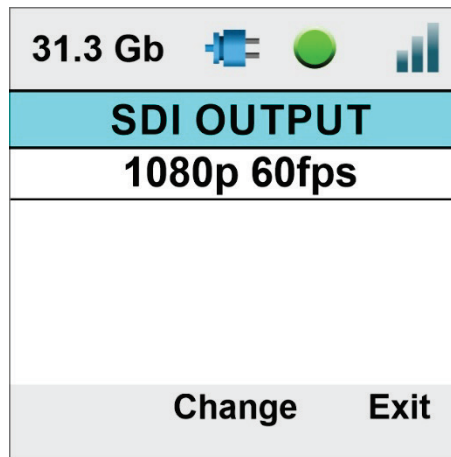

7.3.9 – Rec Counter

This page shows the number of recording of SmartyCam 3. Press "Reset" to reset the counter.

7.3.10 – Overlay

In case you wish to record a video without Overlays, you may disable them in this voice of the menu.

7.3.11 – Clear tracks

Here you can clear all tracks from SmartyCam3.

7.3.12 – Flip over (SmartyCam 3 Sport only)

SmartyCam 3 Sport has a standard ¼ thread in its base that is used for mounting it. Sometimes, in closed cars, it is more comfortable to install the camera upside down. In this case, you have to flip the video over.



















7.3.13 – Factory reset

This menu option resets SmartyCam 3 to its default values, shown in the fourth page of Info function (Paragraph 7.3.14).



7.3.14 – Info

The information here shown are important in case you need help from AiM Support Team. “Restore Info” page tells you which firmware release will be restored if you decide to perform a factory reset.

31.3 Gb  	31.3 Gb  	31.3 Gb  	31.3 Gb  
SYSTEM INFO	CONNECTION INFO	HW INFO	RESTORE INFO
Fw-Rel: 00.00.32 Fw-Date: 06/04/2022 Fw-Hour: 17.33 SN: 11112	AiM-SC3 - 11112	Hw Rel: SMC10C Date: 2022-02-17	Rel: 00.00.27 Date: 06/04/2022 Hour: 17.33
Next  Exit 	Next  Exit 	Next  Exit 	Next  Exit 






7.4 – Update

It allows to update:

- Firmware version
- Configuration (the overlay transmitted to SmartyCam3 Sport/Dual; the camera can load one configuration at a time only)
- Tracks

Updating can be performed in three ways:

- exporting them to the (Micro) SD through AiM RaceStudio 3 software and loading them to SmartyCam 3
- through the Ethernet or USB-C connection (**SmartyCam 3 Dual only**).

31.3 Gb  
UPDATE
FIRMWARE CONFIGURATION TRACKS
Down  Sel  Exit 


7.4.1 – Firmup

SmartyCam 3 can update their firmware through the (Micro) SD:

- insert the (Micro) SD in SmartyCam 3 slot and switch the camera on so that Race Studio 3 will correctly communicate with it.
- remove the card from SmartyCam 3 and insert it in the PC Slot
- run Race Studio 3 and navigate to the top right “web updates” cloud icon
- If there is a new SmartyCam 3 firmware check mark it and click “download”
- the software detects SmartyCam 3 (Micro) SD and – as you click “update device” – loads the firmware on it
- replace the (Micro) SD in its slot in SmartyCam 3 and switch the camera on
- follow this path MENU >> FIRMUP
- the camera shows the available firmware releases
- Select the one you want to install and wait; in a few moments the camera will reboot and the new firmware is installed.

SmartyCam 3 Dual can update the firmware also through the Ethernet or USB-C connection: connect SmartyCam 3 Dual to the PC using the proper cable:

- run Race Studio 3 and navigate to the top right “web updates” cloud icon
- If there is a new SmartyCam 3 firmware check mark it and click “download”
- once the firmware downloaded click “update device” and wait; in a few moments the camera will reboot and updated.

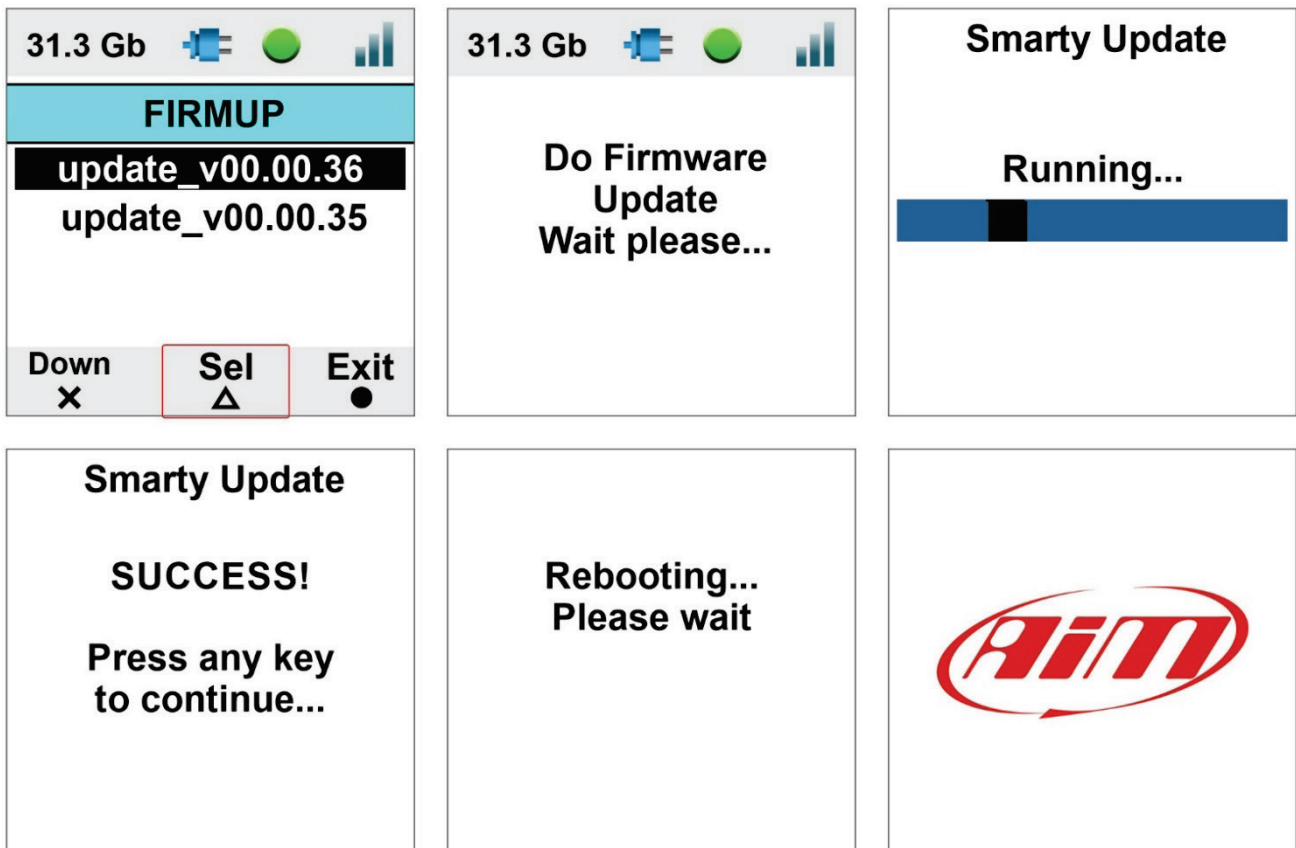

7.4.2 – Tracks update

Please refer to paragraphs 6.2.1 and 7.5.



7.5 – Video file

This page shows the list of video file stored in SmartyCam 3 (Micro) SD card.

31.3 Gb			
VIDEO LIST			
04/15 09:52 2.2M			
04/27 10:44 0.3G			
04/27 13:47 0.4G			
04/28 11:49 0.3G			
Down X	Del △	Exit ●	


8 – SmartyCam 3 and the PC

As for Firmware Updating, Tracks and Configuration Loading SmartyCam 3 can be configured using the (Micro) SD but, in addition to this mode, SmartyCam 3 Dual can be configured also connecting it directly to the PC through Ethernet or USB – C connection.

8.1 – Creating SmartyCam 3 configuration

To create SmartyCam 3 configuration:

- Run Race Studio 3 software
- press “NEW” to create a new configuration
- “New configuration” panel appears
- select “SmartyCam 3”
- fill in the panel that is prompted and press “OK”

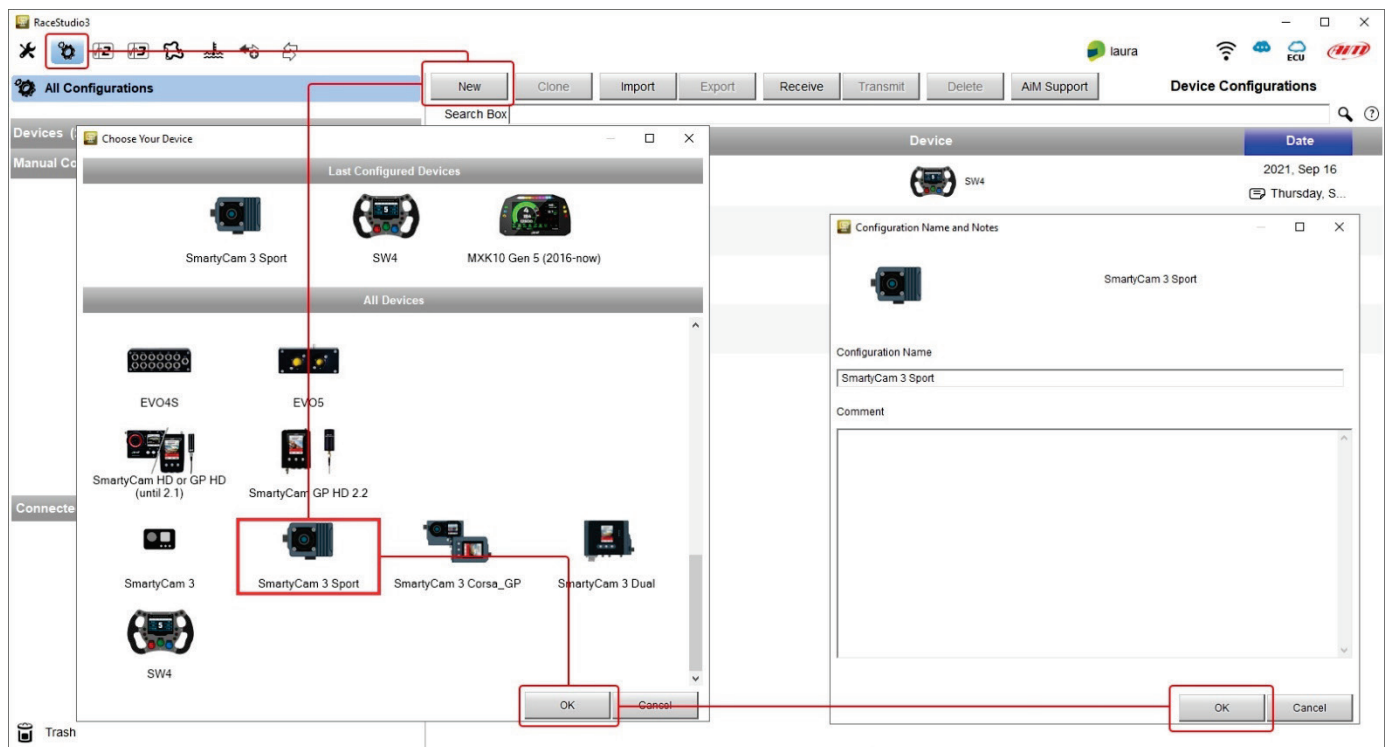

Race Studio 3 software enters directly SmartyCam 3 overlay tab. The tab layout changes according to the camera working mode.

SmartyCam 3 can be:

- connected to a **MASTER** (any **AiM Logger**): in this case, it must be configured in “**SLAVE MODE**” and will receive all the information to be shown from the logger
- **Standalone**: in this case it is connected to AiM GPS Module only and will show only GPS data (position, speed, accelerations, Lap Number, Lap Time)





If **SmartyCam 3** is **standalone**, you only need to set:

- “Overlay” tab
- “Parameters” tab




If, on the contrary, **SmartyCam 3** is **connected to a master**, you also need to set CAN Protocol tab.

SmartyCam 3 Dual has a second CAN that, when in Stand Alone installation, allows to set a CAN protocol for getting the data from an ECU as shown here below.




8.1.1 – Configuring SmartyCam 3 overlay

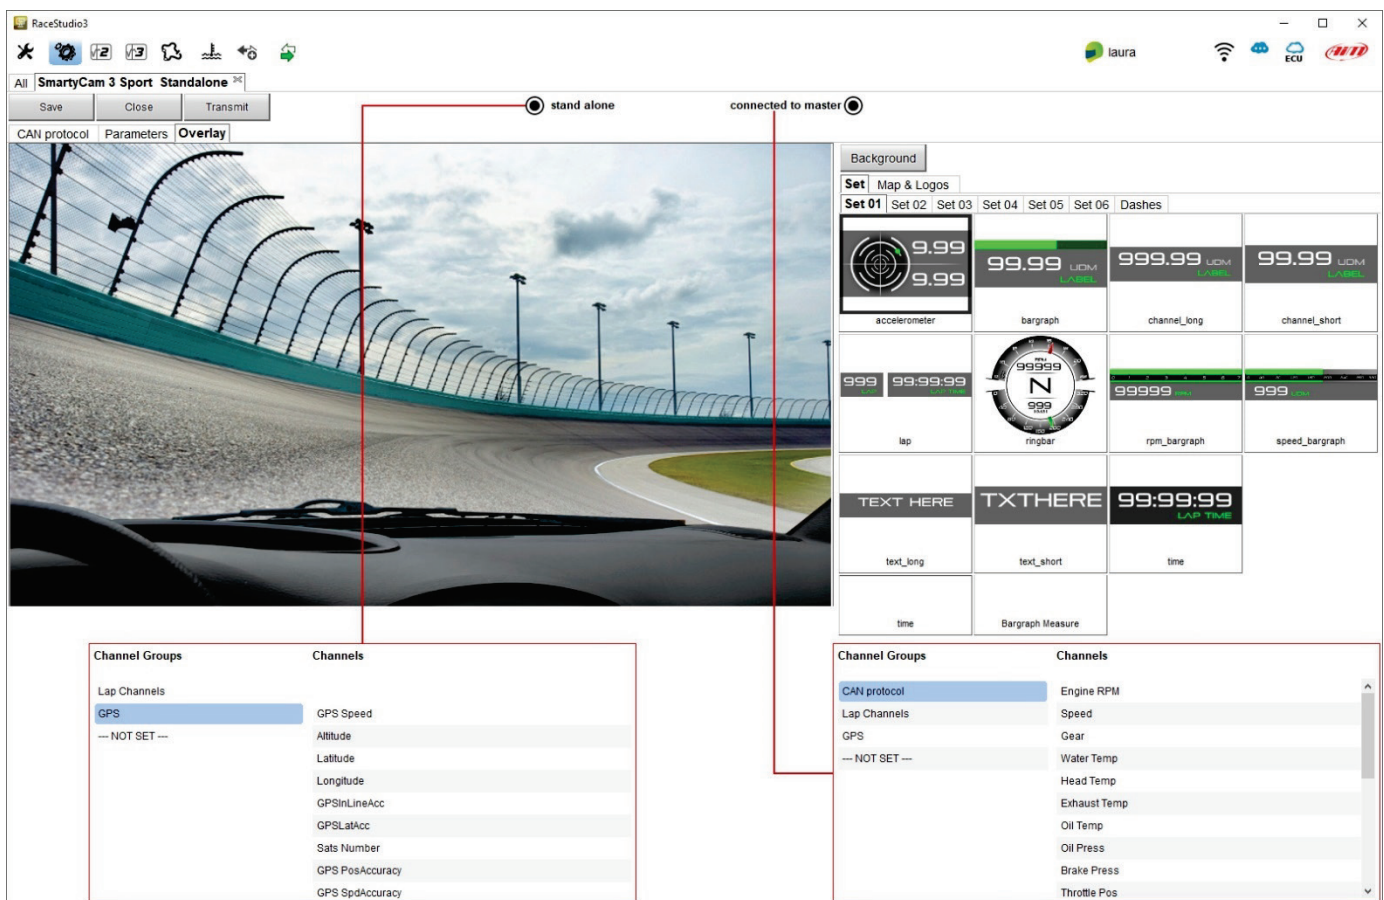




The overlays you may add to your video are:


- Graphical data
- Track Map and Logos
- Second Camera as **P in P** (picture in picture – **SmartyCam 3 Dual only**) as shown here on the right.

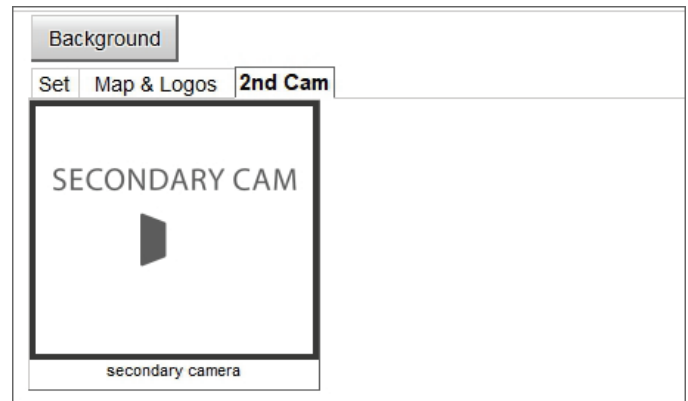

You may choose in a wide set of graphical controls. Simply click on the one you prefer and drop it to the desired position in the video itself.

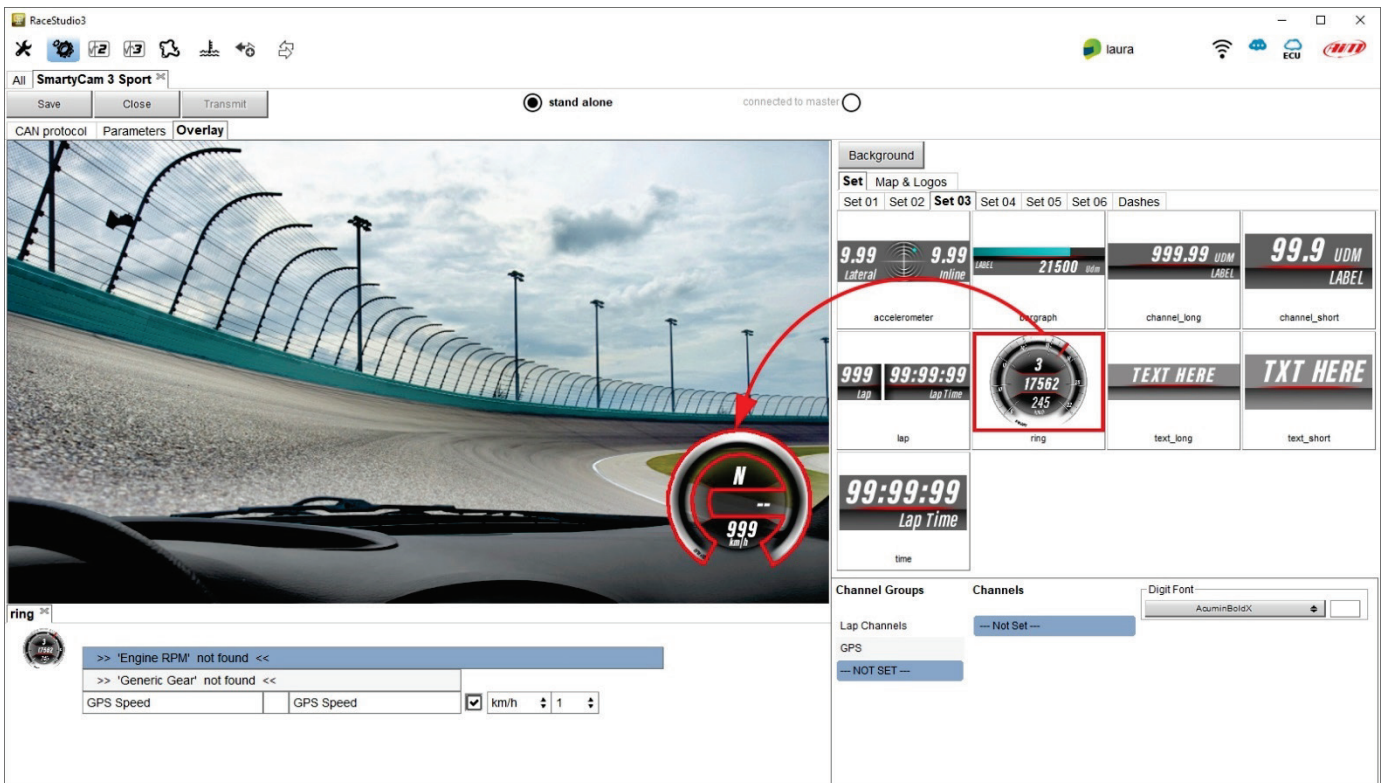


If a graphical control may show a range of possible information, you must select the appropriate channel. In the example below you are configuring a control that may show Lap Number, Lap Time, best Time, Predictive Time etc.: simply click on the desired information and you will set it.

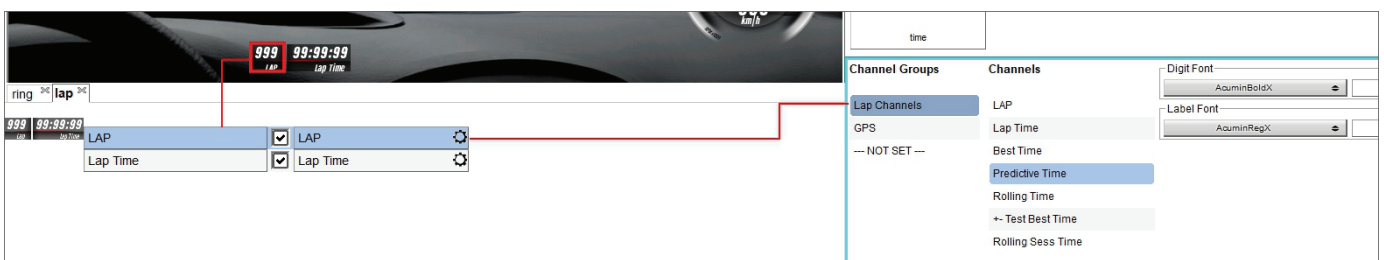


8.1.2 – Logos & MAP and second camera Setting

To add the map of the circuit or a logo to the video please click on Maps & Logos and drop the logo or the Track Map in the desired position. You may easily change shape, dimension, and position or add a new logo.

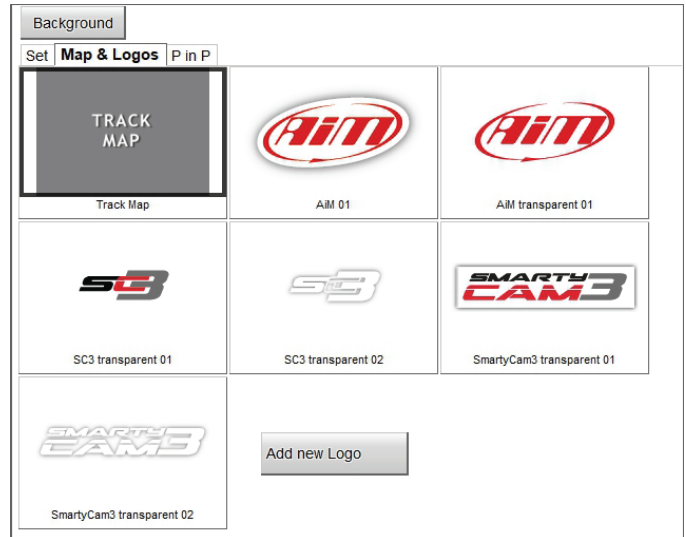

Please, note that, when configuring SmartyCam 3, you only set position and dimension of the track map while the shape of the circuit dynamically changes according to the circuit you are racing on.

Here on the right you see an overlay where both track map and secondary camera as Picture in picture (**SmartyCam 3 dual only**) are set.

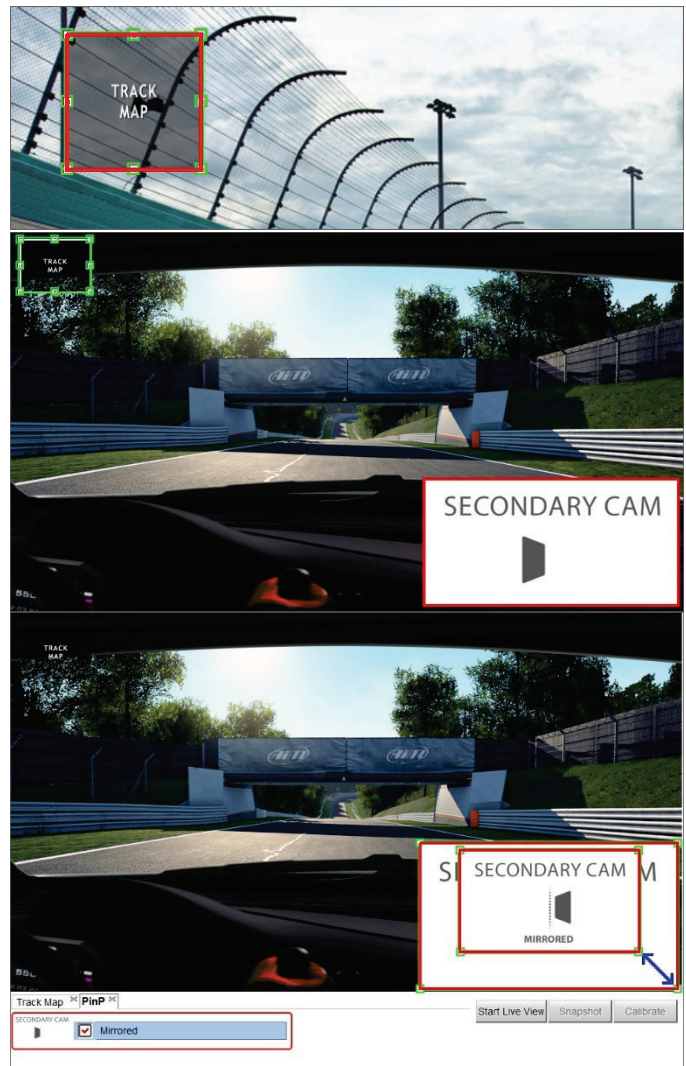


Starting from:

- SmartyCam Dual firmware version 1.03.05
- and Race Studio 3 software version 3.55.07

it is possible to resize and mirror the secondary camera as shown here on the right.

8.1.3 – Configuring SmartyCam 3 parameters

In case of a **Stand-Alone** installation you may set the condition that enables SmartyCam3 Sport start recording.

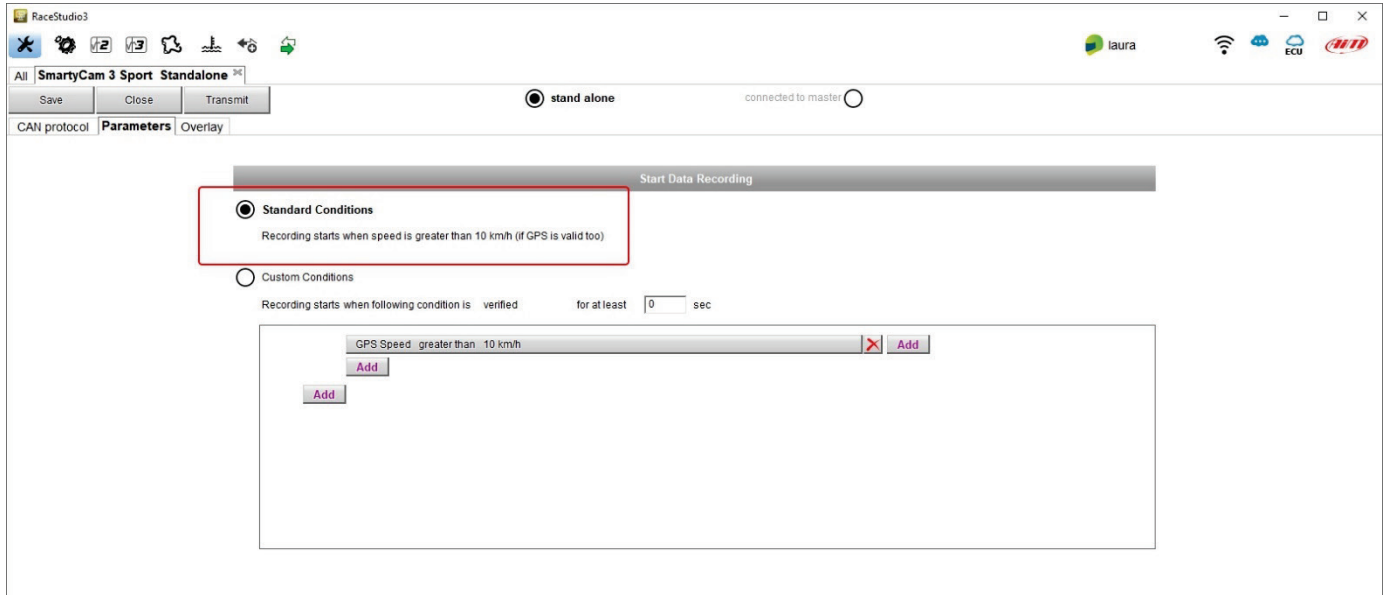

If SmartyCam 3 is **connected to a Master** it starts recording when the master does.

8.1.4 – SmartyCam 3 connected to a master

The connection between any AiM Logger and SmartyCam3 Sport/Dual is made through the CAN bus. The Logger transmits data to the camera in two slightly different ways:

- AiM default Protocol
- Advanced Protocol

AiM Default Protocol transmits a rather limited range of information, enough for a wide range of installations. They are shown below:

Enabled Channels (Max. 80) 20 / 20


ID	<input checked="" type="checkbox"/>	Name	Function	Unit	Freq
CC01	<input checked="" type="checkbox"/>	Engine RPM	Engine RPM	rpm	10 Hz
CC02	<input checked="" type="checkbox"/>	Speed	Vehicle Spd	km/h 0.1	10 Hz
CC03	<input checked="" type="checkbox"/>	Gear	Gear	gear	10 Hz
CC04	<input checked="" type="checkbox"/>	Water Temp	Water Temp	C 0.1	10 Hz
CC05	<input checked="" type="checkbox"/>	Head Temp	Head Temp	C 0.1	10 Hz
CC06	<input checked="" type="checkbox"/>	Exhaust Temp	Exhaust Temp	C 0.1	10 Hz
CC07	<input checked="" type="checkbox"/>	Oil Temp	Oil Temp	C 0.1	10 Hz
CC08	<input checked="" type="checkbox"/>	Oil Press	Oil Pressure	bar 0.01	10 Hz
CC09	<input checked="" type="checkbox"/>	Brake Press	Brake Press	bar 0.1	10 Hz
CC10	<input checked="" type="checkbox"/>	Throttle Pos	Pct Throttle Load	% 0.01	10 Hz
CC11	<input checked="" type="checkbox"/>	Brake Pos	Pct Brake Load	% 0.01	10 Hz
CC12	<input checked="" type="checkbox"/>	Clutch Pos	Percent	% 0.01	10 Hz
CC13	<input checked="" type="checkbox"/>	Steering Pos	Steering Pos	deg 0.1	10 Hz
CC14	<input checked="" type="checkbox"/>	Lambda	Lambda	lambda 0.01	10 Hz
CC15	<input checked="" type="checkbox"/>	Lateral Acc	Lateral Accel	g 0.01	10 Hz
CC16	<input checked="" type="checkbox"/>	Inline Acc	Inline Accel	g 0.01	10 Hz
CC17	<input checked="" type="checkbox"/>	Fuel Level	Pct Fuel Level	% 0.01	10 Hz
CC18	<input checked="" type="checkbox"/>	Battery Voltage	Voltage	mV	10 Hz
CC19	<input checked="" type="checkbox"/>	Vertical Acc	Vertical Accel	g 0.01	10 Hz
CC20	<input checked="" type="checkbox"/>	Logger Temp	Temperature	C 0.1	10 Hz

If you wish to transmit a different set of information, you may do as follows:


- Configure your Logger in order to transmit a different SmartyCam Stream
- Select the desired SmartyCam Stream in SmartyCam 3 configuration

Follow the steps shown in the following figures:

- select “Advanced” option in SmartyCam Stream layer when you configure the Logger.

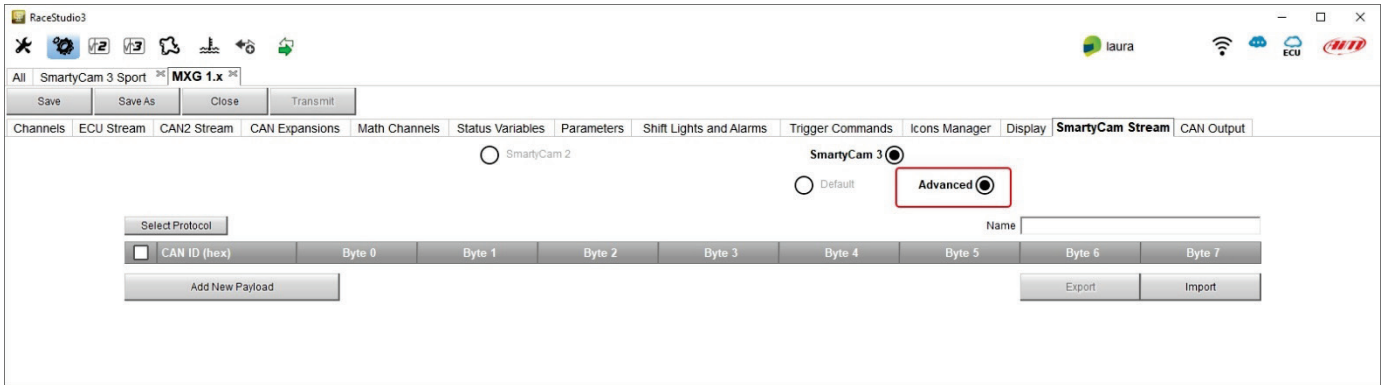

- Create your desired Stream, defining the required IDs and fields
- Name the protocol and save it

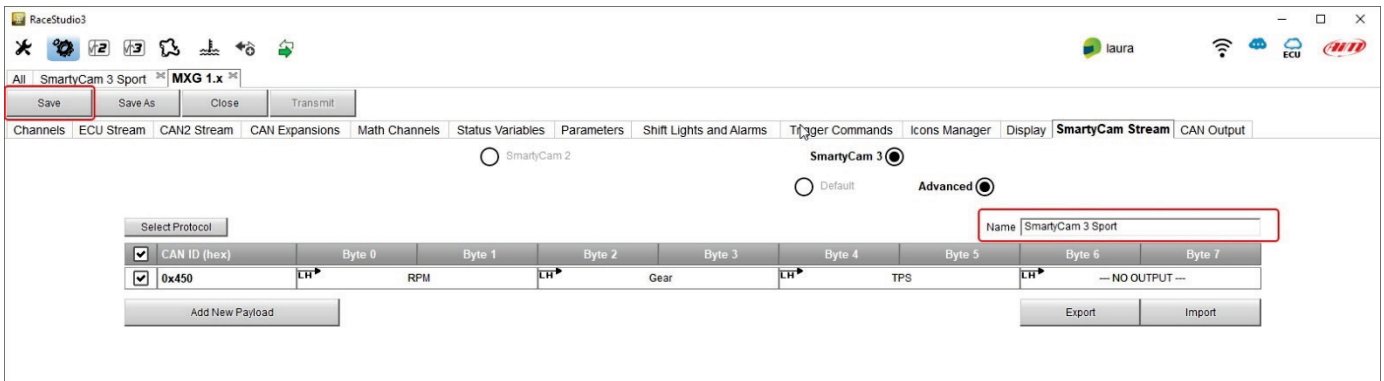

- Once the Logger configuration saved, you may import the protocol in SmartyCam 3 configuration and use the channels as required.


Please, note that ALL data transmitted to SmartyCam3 Sport are stored as metadata directly in the .mp4 file in order to be analysed by RaceStudio3 Analysis

The screenshot shows the RaceStudio3 interface with the 'Select Protocol' dialog box open. The dialog displays the selected protocol 'SmartyCam 3 Sport' and its configuration 'MXG 1.x'. Below the dialog, a table lists the enabled channels for the 'AIM Stream Protoc: AIM - AIM STREAM (ver. 02.00.01)'.

ID	Name	Unit	Resolution	Frequency
CC01	Engine RPM	rpm	1	10 Hz
CC02	Speed	km/h	1	10 Hz
CC03	Gear	gear	1	10 Hz
CC04	Water Temp	°C	0.1	10 Hz
CC05	Head Temp	°C	0.1	10 Hz
CC06	Exhaust Temp	°C	0.1	10 Hz
CC07	Oil Temp	°C	0.1	10 Hz
CC08	Oil Press	Oil Pressure	bar 0.01	10 Hz
CC09	Brake Press	Brake Press	bar 0.1	10 Hz
CC10	Throttle Pos	Pct Throttle Load	% 0.01	10 Hz
CC11	Brake Pos	Pct Brake Load	% 0.01	10 Hz
CC12	Clutch Pos	Percent	% 0.01	10 Hz
CC13	Steering Pos	Steering Pos	deg 0.1	10 Hz
CC14	Lambda	Lambda	lambda 0.01	10 Hz
CC15	Lateral Acc	Lateral Accel	g 0.01	10 Hz
CC16	Inline Acc	Inline Accel	g 0.01	10 Hz
CC17	Fuel Level	Pct Fuel Level	% 0.01	10 Hz
CC18	Battery Voltage	Voltage	mV	10 Hz
CC19	Vertical Acc	Vertical Accel	g 0.01	10 Hz
CC20	Logger Temp	Temperature	C 0.1	10 Hz

8.1.5 – ECU Stream (SmartyCam 3 Dual only)

SmartyCam 3 Dual features a second CAN protocol that allows the user to set the ECU Stream of a wide number of supported ECUs. At the very first configuration “ECU Stream” tab prompts the panel to set as shown here below. To change it in a second moment press “Change ECU” button and the panel will be prompted again.

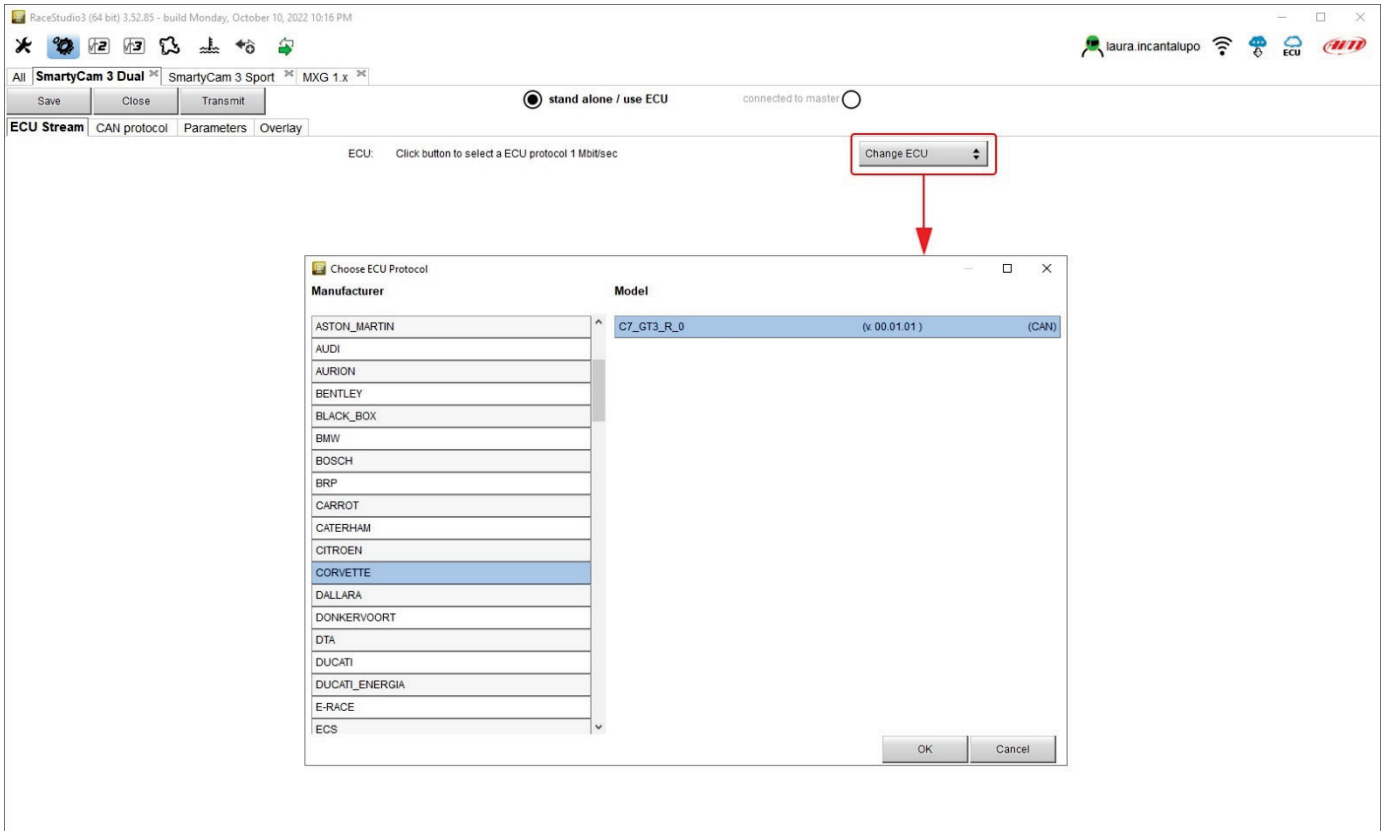


8.2 – Loading the configuration to SmartyCam 3

SmartyCam 3 Sport allows the transmission of the configuration through the Micro SD card. SmartyCam 3 Dual allows the transmission of the configuration through the SD Card but through Ethernet/USB-C connection too.

Configuration transmission through (Micro) SD Card

After having created the configuration, you have to load it to your SmartyCam 3:

- press “Save” button top left of the page
- insert a (Micro) SD in SmartyCam3 slot
- remove the (Micro) SD from SmartyCam3 slot and insert it the PC slot
- press “Transmit” button; the software recognizes the (Micro) SD and loads the configuration
- remove the (Micro) SD from the PC slot
- insert it in SmartyCam3 slot
- follow this path: “MENU” -> “UPDATE” -> “CONFIGURATION” and load the configuration to SmartyCam 3

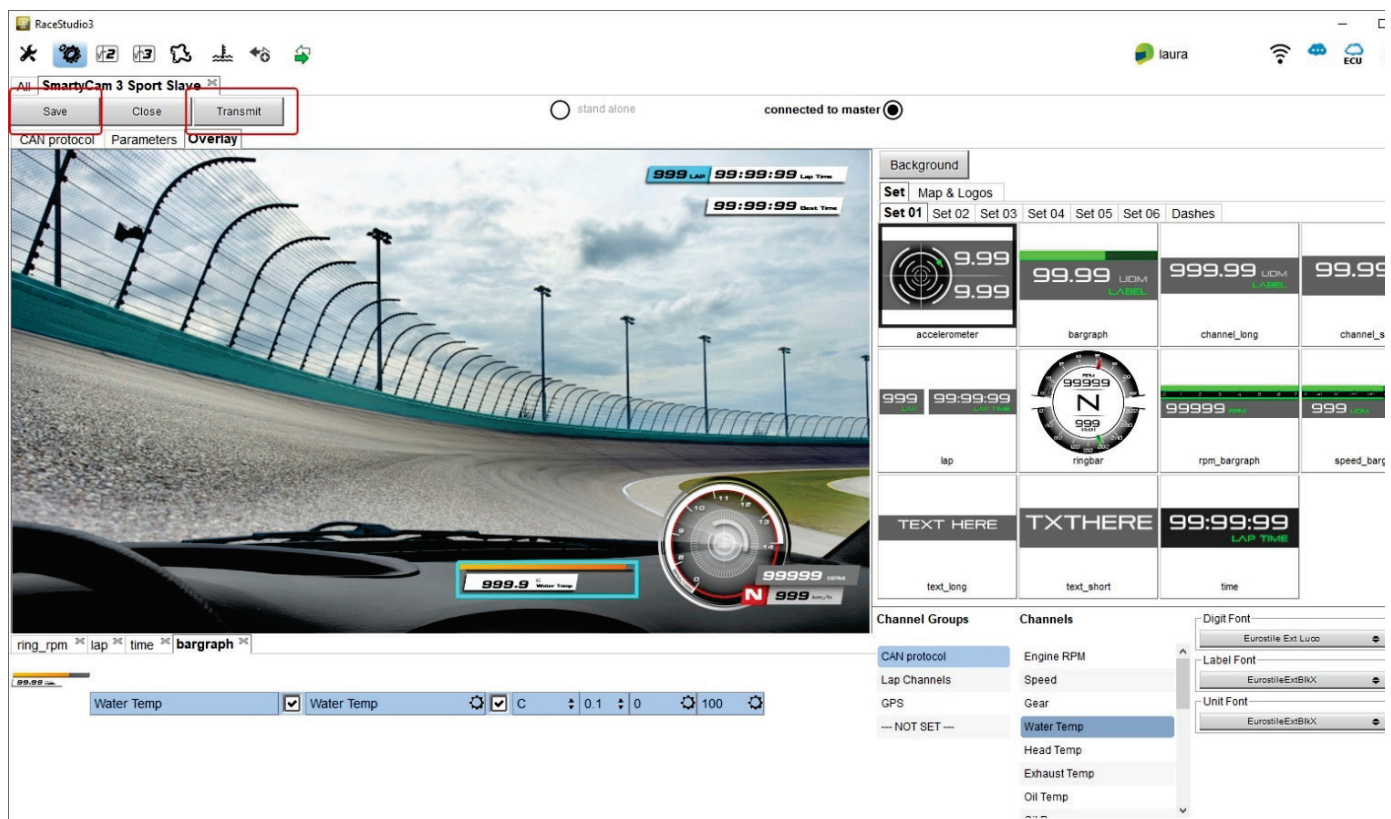

Configuration transmission through Ethernet or USB-C connection

SmartyCam 3 Dual allows you to transmit the configuration to the camera using the Ethernet or USB-C connection. To do so, with the camera switched on and connected to the PC:

- Press “Save” top left on the software view
- Press “Transmit” and the camera will receive the configuration
- Follow this path on SmartyCam 3 Dual: “MENU” -> “UPDATE” -> “CONFIGURATION” and the configuration is loaded to SmartyCam 3 Dual.

8.3 – Track Management

Track Manager is the software section dedicated to tracks management. Here you can create and delete new tracks, modify the settings as well as load them to the Card or straight to SmartyCam 3 (Dual only). Press “Tracks” on Race Studio 3 top left keyboard.



The main page is divided in three columns: on the **Left**:


- on top, the filters to collect the tracks; by default all tracks are shown – “All Tracks (5327)” in the image below. The filters are:
 - nations: select the nation you want to see the tracks of
 - smart collections: clicking the setting icon a panel that allows to select continent, nation, circuit type and road surface is prompted; select the criteria you wish and name the collection specifying the used filter if you like it
 - manual: clicking the setting icon a new collection panel is prompted: name it and drag and drop the tracks in it
- bottom the connected devices in the image SmartyCam 3 Sport “SmartyCam 3 ID 4111112 [TEST-2 – D:]”

The column **in the middle** shows:


- on top a fast search bar, that allows to select the tracks which satisfy personal research criteria; pressing “?” a tooltip explains the research criteria (highlighted in red below); to say:
 - track long name contains.....: long name is the name in bold in each track box
 - track short name contains....: short name is the track name shown top right of each track box
 - track city begins with....: is the name of the city the track is located in
- all the tracks listed in Race Studio 3 database. It automatically updates at start up if a connection to the Internet is available.

The column on the **Right** shows two tabs:

- the data sheet of the track you are mousing over and
- its weather forecast if available.

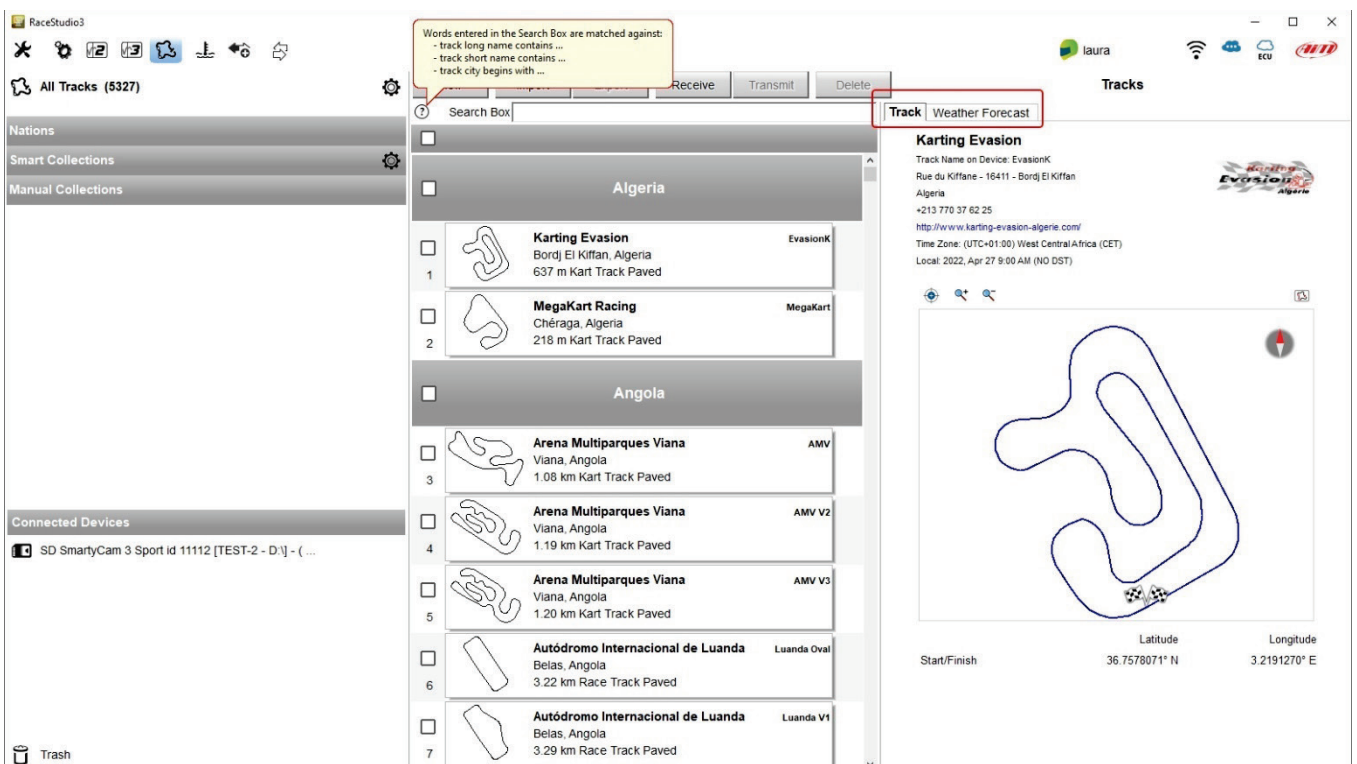


SmartyCam 3 (Micro) SD is shown left bottom of the page; clicking it tracks stored are shown right on the page. Tracks created by the user are labelled "User"; any difference among tracks stored and the same track included in AiM database is notified.

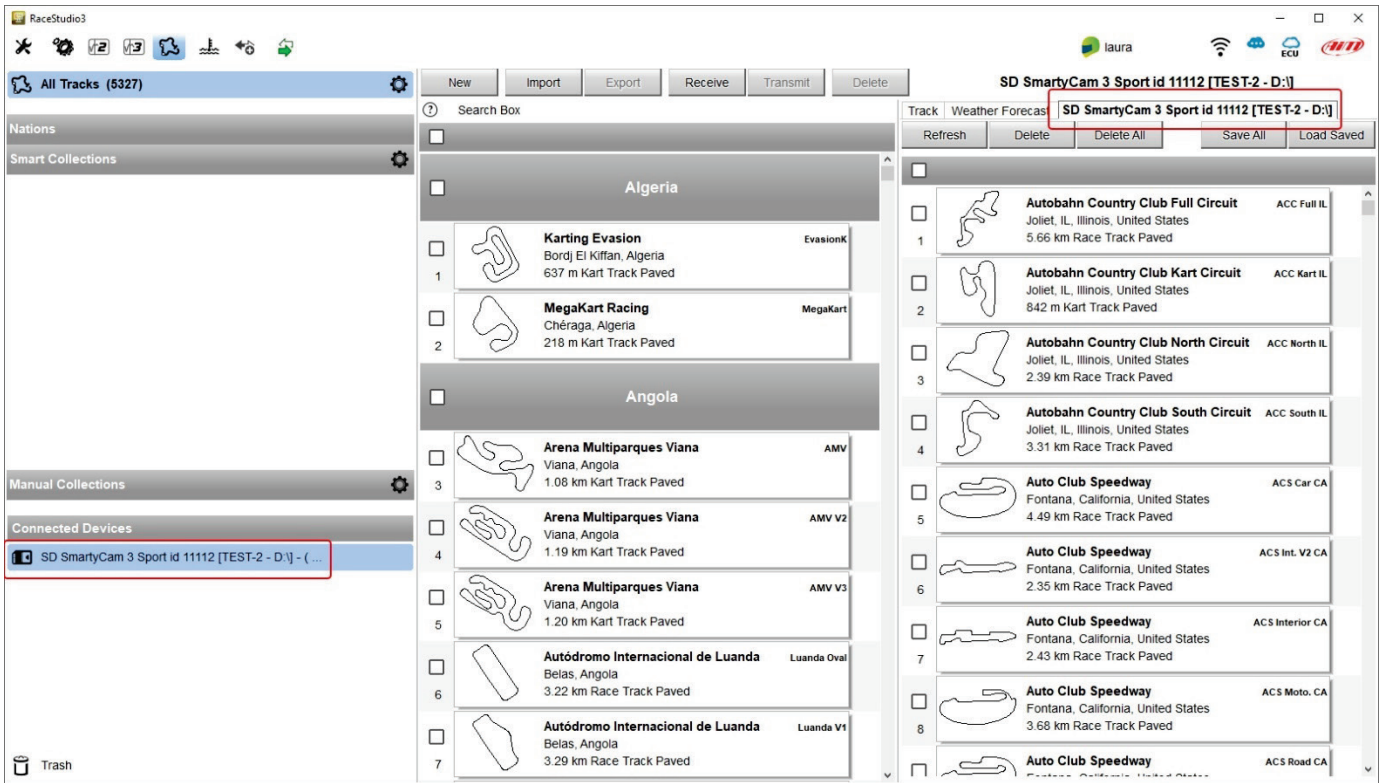

The page keyboards are for:



- **New:** create a new track
- **Import:** import one or more tracks stored in SmartyCam 3 or on another external device
- **Export:** export one or more tracks to a specific PC folder or to another peripheral device
- **Receive:** receive from SmartyCam 3 the tracks created by the user (if no device is connected the button is disabled)
- **Transmit:** transmit one or more tracks from the PC to SmartyCam 3 (if no device is connected the button is disabled)
- **Delete:** delete one or more tracks from Race Studio 3 Database




- **Refresh:** refresh the track list stored in SmartyCam 3
- **Delete:** delete one or more tracks from SmartyCam 3 card
- **Delete All:** delete all tracks stored in SmartyCam 3 card
- **Save all:** save all the tracks stored in SmartyCam 3 card creating creates a zip file that can be loaded to another AiM device
- **Load Saved:** load the tracks previously saved in SmartyCam 3 card.

8.4– Video Management

Once a track session is over it is possible to review SmartyCam 3 video on a PC using the (Micro) SD:

- remove card from the camera
- place it in the PC slot and manage it as an USB peripheral
- run Race Studio3 software
- click on the card bottom left of the software page
- the list of the video stored in the card is prompted right of the page
- press “Download” button on the top keyboard
- fill in the panel that is prompted
- press “OK”

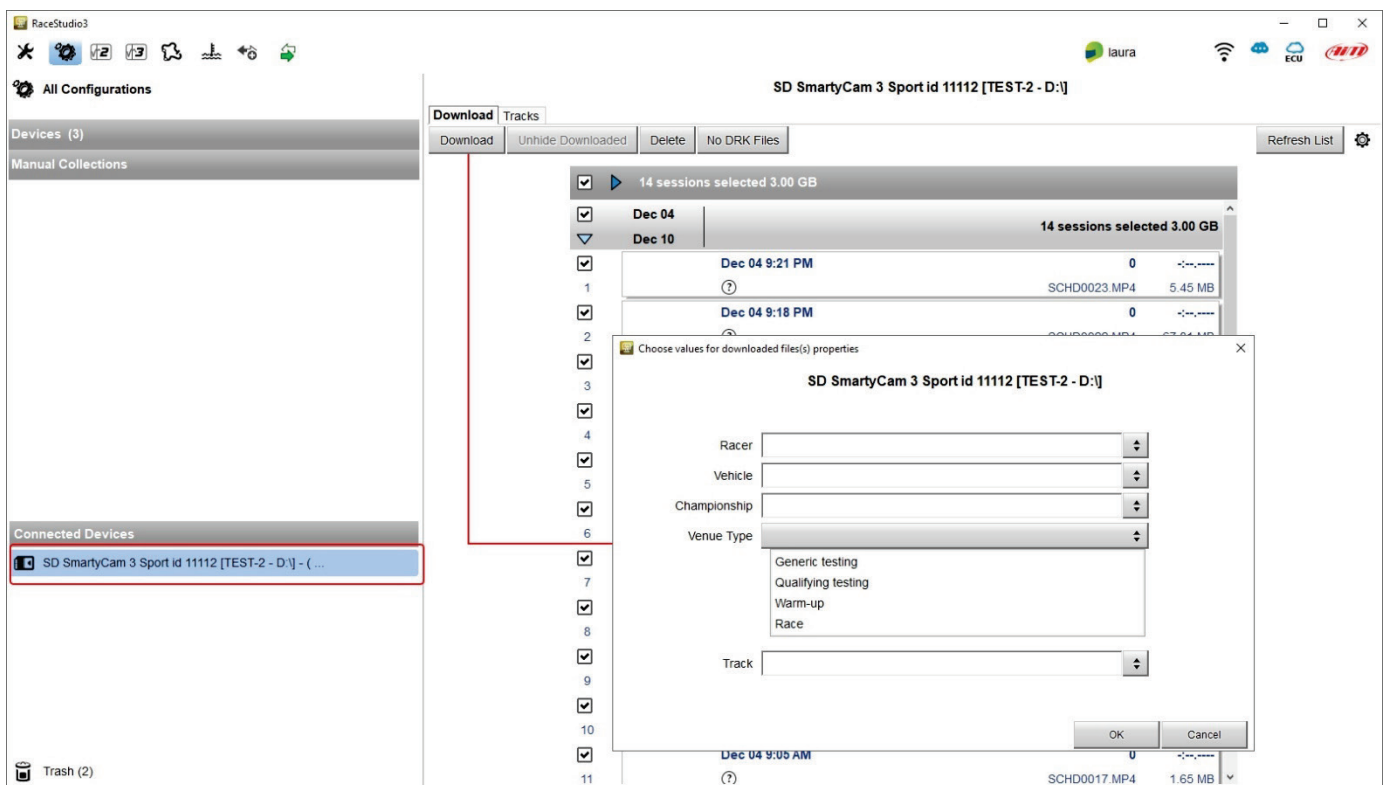

As said before **SmartyCam 3 Dual** does not need to remove the SD from the camera slot. Using the Ethernet port or the USB-C cable you can download the video file directly from the connected camera.

With SmartyCam 3 Dual switched on and connected simply press “Download” button and the file are downloaded on your PC.



Video download starts.

The screenshot shows the RaceStudio3 interface with a download window open for the device "SD SmartyCam 3 Sport id 1400109 [SC3TEST1 - D:]". The window title is "SD SmartyCam 3 Sport id 1400109 [SC3TEST1 - D:]". The window contains a "Download" tab and a "Tracks" tab. The "Download" tab is active and shows a list of 14 sessions selected, totaling 3.00 GB. The sessions are listed with their start times and file sizes. The sessions are:

Session ID	Start Time	File Name	File Size
1	Dec 04 9:21 PM	SCHD0023.MP4	5.45 MB
2	Dec 04 9:18 PM	SCHD0022.MP4	67.81 MB
3	Dec 04 6:20 PM	SCHD0021.MP4	51.98 MB
4	Dec 04 5:01 PM	SCHD0031.MP4	1.25 GB
5	Dec 04 3:12 PM	SCHD0030.MP4	24.23 MB
6	Dec 04 3:10 PM	SCHD0029.MP4	24.56 MB
7	Dec 04 3:09 PM	SCHD0028.MP4	82.77 MB
8	Dec 04 3:07 PM	SCHD0027.MP4	19.82 MB
9	Dec 04 2:58 PM	SCHD0026.MP4	43.08 MB
10	Dec 04 2:57 PM	SCHD0025.MP4	4.82 MB
11	Dec 04 9:05 AM	SCHD0017.MP4	1.65 MB



When all files have been downloaded run Race Studio3 Analysis and the video just downloaded are prompted in the central column of the page. Click on any video to start watching it.

Please refer to RaceStudio3 Analysis user manual for any further information concerning the software working mode.

The screenshot displays the RaceStudio3 software interface. On the left, a sidebar lists 'All Events (96 sessions of 96)' with columns for '#', 'Date', and 'Track'. Below this are sections for 'Recent Sessions', 'Smart Collections', and 'Manual Collections'. The main window shows a table of lap data for the date '2022, Apr 27'. The table has columns for 'Lap(s)', 'Best', 'Venue Racer', 'Vehicle Cham...', and 'Track'. A summary table below the main table shows 'Lap 1' with a 'Time' of '0:13.6310', 'Pct' of 'inf', 'Min' of '0.2', and 'Avg' of '1.0'. On the right, a graph titled 'GPS Speed (km/h)' vs 'Time [s]' shows a fluctuating line representing speed over time, with a peak near 2.0 km/h.

Lap	Time	Pct	Min	Avg
1	0:13.6310	inf	0.2	1.0



9 – Technical specifications and drawings

SmartyCam 3 Sport


Video format	H264 – 1920x1080 pixels at 30 fps
Display resolution	128x128 pixels
Lens	Low distortion camera lens
CMOS Sensor	Global shutter
Field of view	67° or 84°
External power	9-15V
Supported (Micro) Card (not included)	up to 2Tb
Connector	1 Binder 712 female
Working temperature range	-10°C/+50°C
Auto power ON	Yes
Auto power OFF	Yes
Auto Start/Stop recording	Yes
Body	Nylon fiberglass charged and coated aluminium
Dimensions	79.9x54x46.5
Weight	200g battery included
Waterproof	IP65

SmartyCam 3 Dual


Video format	H264 – 1920x1080 pixels at 60 fps
Display resolution	2,4" 240x320 pixels
Lens	Low distortion camera lens
CMOS Sensor	Global shutter
Field of view	67°, 84° or 120
Internal battery	rechargeable lithium battery
Video Output	3G-SDI
External power	9-15V
Supported SD Card (not included)	up to 2Tb
Connectors	1 Deutsch 22 pins 1 SMA SDI Video Out 2 SMA bullet connection 1 USB-C
Working temperature range	-10°C/+50°C
Auto power ON	Yes
Auto power OFF	Yes
Auto Start/Stop recording	Yes
Body	Aluminium
Dimensions	Main Unit 154.4x109.6x45mm bullet cameras 24 diameter x 48.2mm
Weight	Main unit 800g battery included bullet 45g each
Waterproof	IP65



SmartyCam 3 Sport dimensions in mm [inches]

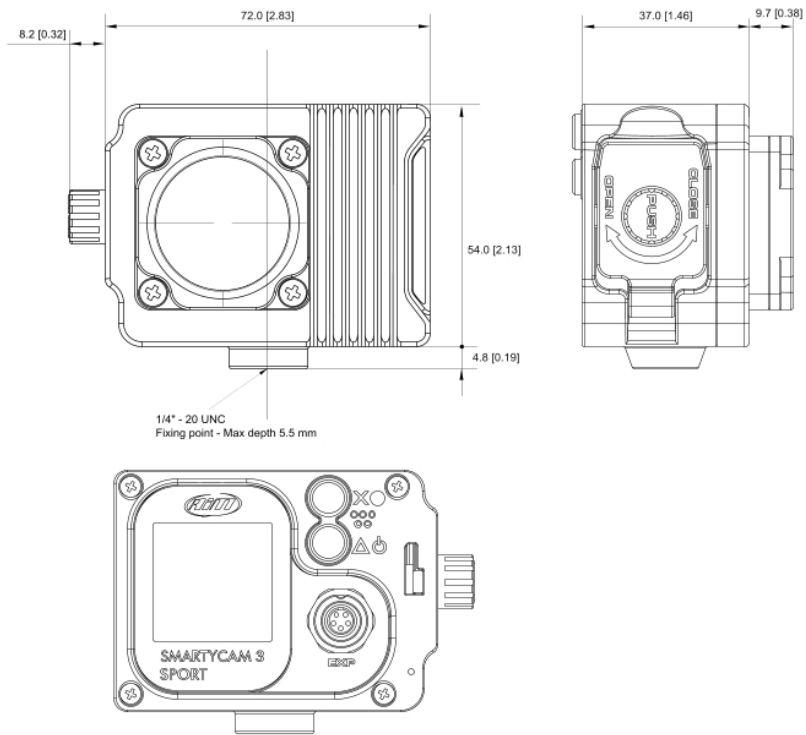


SmartyCam 3 Sport pinout

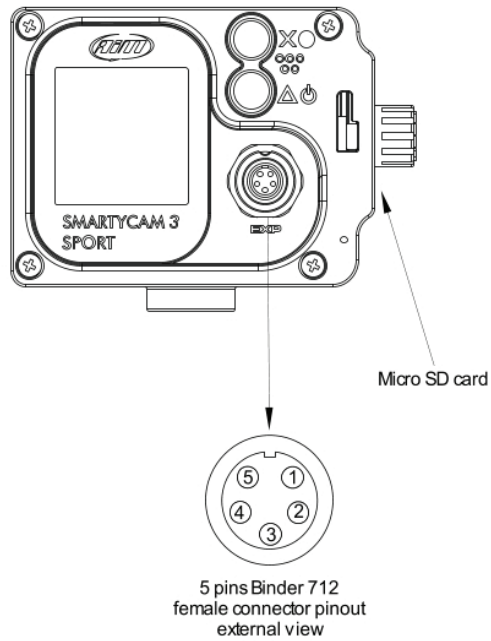


EXP	
1	CAN+
2	GND
3	+Vb out
4	CAN-
5	+Vb ext



SmartyCam 3 Dual Dimensions in mm [inches]

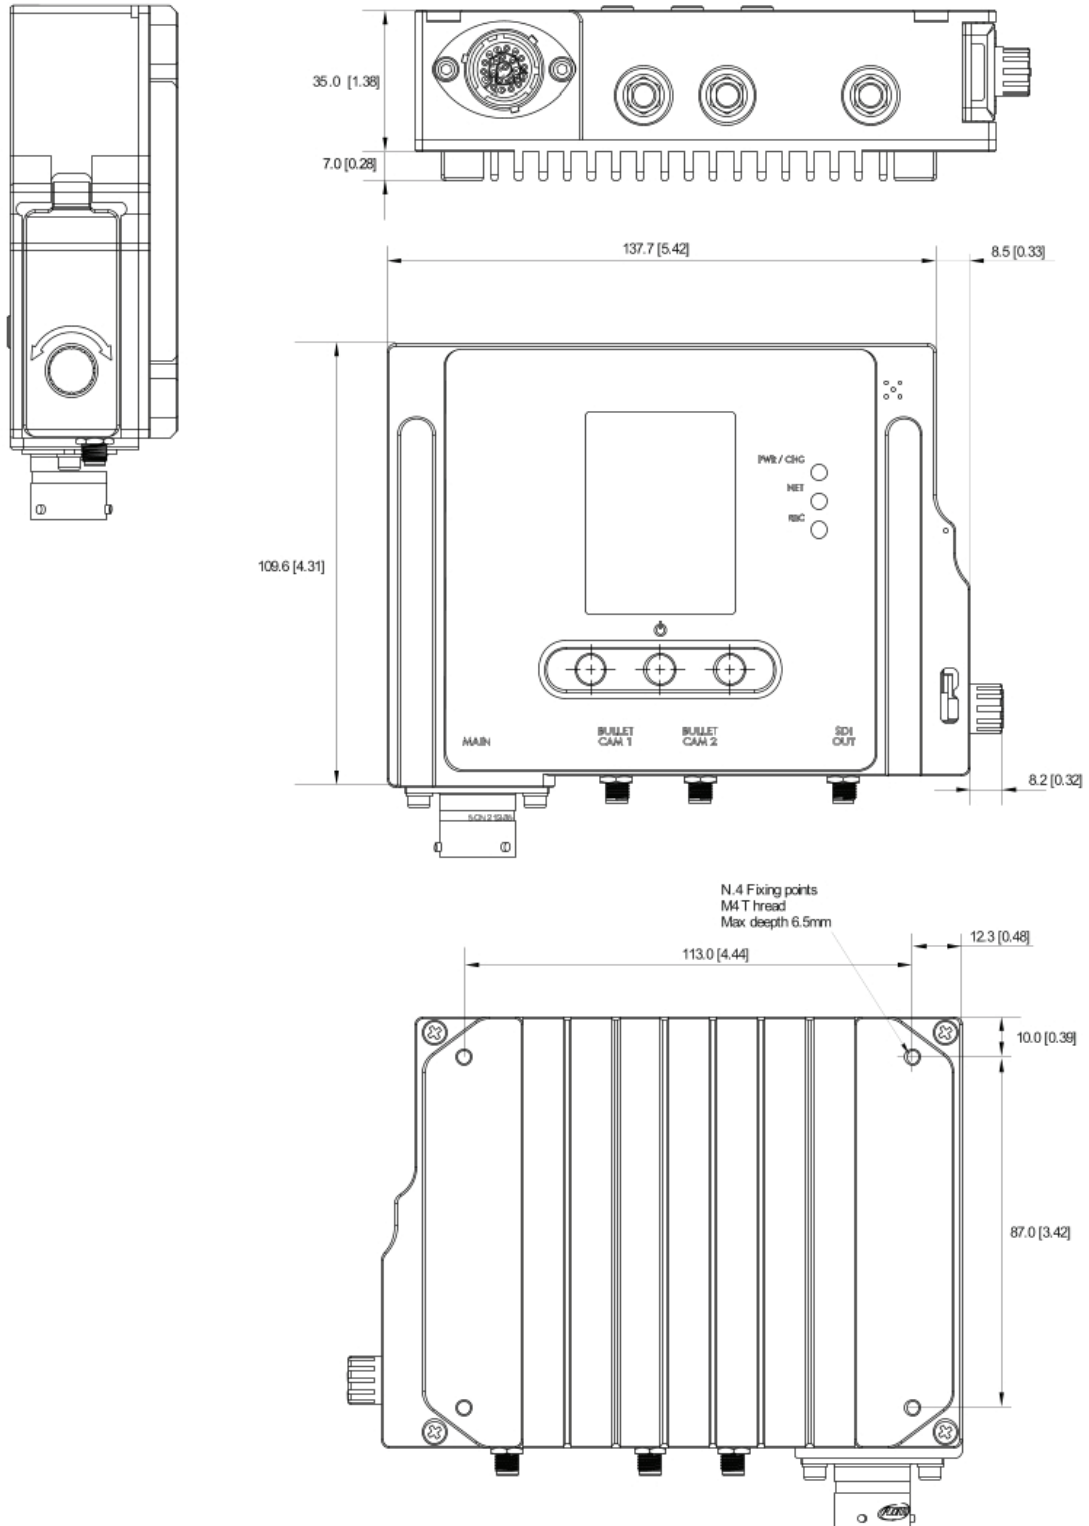

SmartyCam 3 Dual pinout

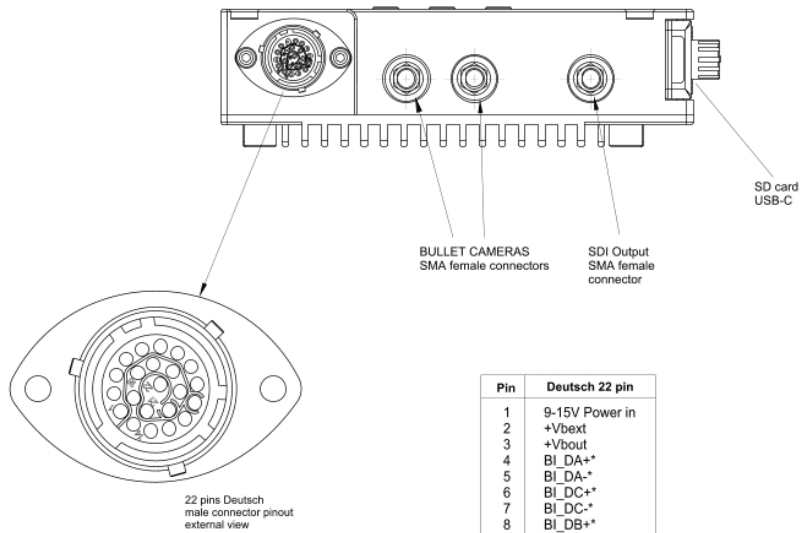


Pin	Deutsch 22 pin
1	9-15V Power in
2	+Vbext
3	+Vbout
4	BI_DA+*
5	BI_DA-*
6	BI_DC+*
7	BI_DC-*
8	BI_DB+*
9	BI_DB-*
10	GND
11	GND
12	Not connected
13	ECU CAN-
14	Ext MIC-
15	Ext MIC-
16	AIM CAN-
17	AIM CAN+
18	BI_DD-*
19	BI_DD+*
20	GND
21	ECU CAN+
22	Not connected


* Ethernet



SmartyCam 3 Dual Standard harness

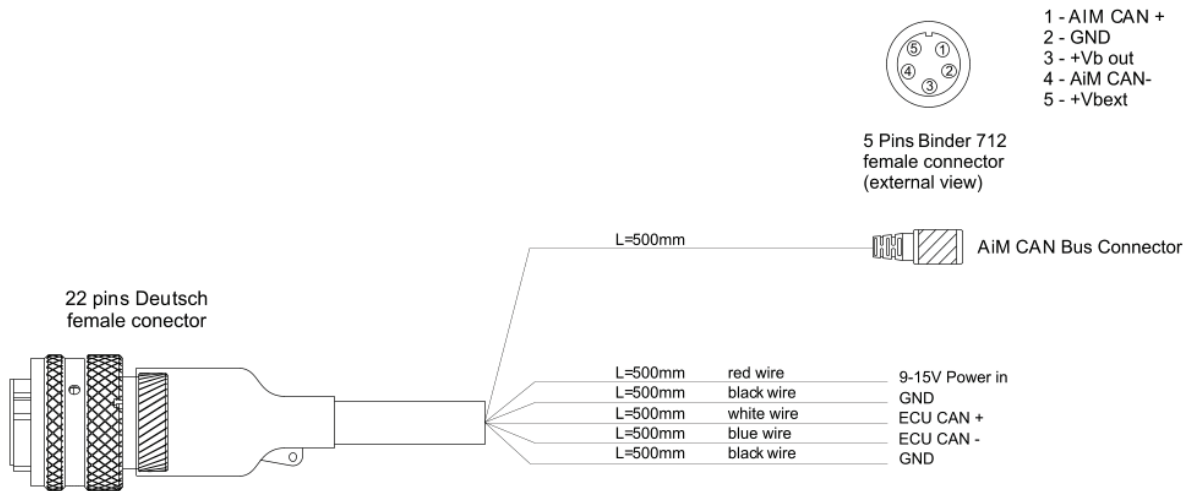

SmartyCam 3 Dual Standard+Ethernet harness

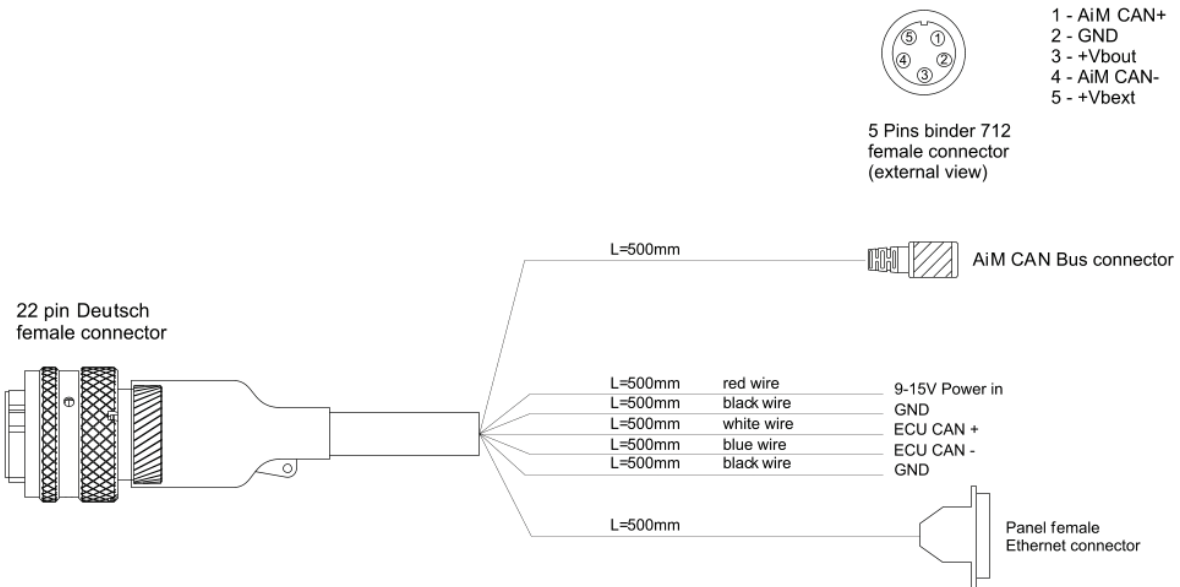



SmartyCam 3 Dual Full harness

