

PKP-2600-SI
CANOPEN USER MANUAL



THE PRESENT MANUAL IS FOR REFERENCE ONLY AND MIGHT BE NOT UP TO DATE TO THE LATEST VERSION. PLEASE CONTACT US FOR GETTING THE MOST UPDATED FILE

Table of contents


1.	How to connect Deutsch 4 pin:	4
2.	Reference	4
3.	Default settings	5
	NMT MESSAGES	5
4.	Start CANopen node (keypad activation message)	5
5.	Enter pre-operational	5
6.	Reset CANopen node	6
7.	Stop CANopen node	6
8.	Boot-up service	6
9.	Heartbeat message	7
	• PKP-2600-SI	7
11.	Set LED ON message	8
	• PKP-2600-SI	8
12.	Set LED Blink message	9
	• PKP-2600-SI	9
13.	Indicator LEDs brightness level	9
14.	Backlight brightness level	10
	SDO Messages:	10
15.	Object 2000h: Digital input module, keys states	10
	• PKP-2600-SI	10
16.	Object 2001h: Digital output module	11
a)	Set LED ON	11
	• PKP-2600-SI	11
b)	Read LED ON	11
	• PKP-2600-SI	11
17.	Object 2002h: Digital output module	12
a)	Set LED blink	12
	• PKP-2600-SI	12
b)	Read LED blink	13
	• PKP-2600-SI	13
a)	Set Indicator LED brightness level	13
b)	Backlight brightness level	13

c)	Backlight color	14
d)	Set default backlight color	14
e)	Set startup Indicator LED brightness level	15
f)	Set startup backlight brightness level.....	15
	19.Object 2010h: Baud rate setting	15
	20.Object 2011h: Set Boot-up service	16
	21.Object 2012h: Set device active on startup.....	16
	22.Object 2013h: Set CANopen node ID	16
	23.Object 2014h: Set startup LED show	18
	24.Object 2100h: Set DEMO mode	18
	25.Object 1017h: Producer heartbeat time	19
	Heartbeat message.....	19
	26.Object 1000h: Device Type.....	20
	27.Object 1001h: Error Register	20
	28.Object 1008h: Manufacturer Device Name	20
	29.Object 1009h: Manufacturer Hardware Revision	21
	30.Object 100Ah: Manufacturer Firmware Revision	21
	31.Object 100Bh: Model ID	22
	32.Object 1018h: Identity Data	23
	33.Object 1400h: Receive PDO Communication Parm 0.....	23
	34.Object 1401h: Receive PDO communication Parm 1	24
	35.Object 1402h: Receive PDO communication Parm 2	24
	36.Object 1403h: Receive PDO communication Parm 3	25
	37.Object 1600h: Receive PDO mapping Parameter 0	25
	38.Object 1601h: Receive PDO mapping Parameter 1	26
	39.Object 1602h: Receive PDO mapping Parameter 2	26
	40.Object 1603h: Receive PDO mapping Parameter 3	27
	41.Object 1800h:	27
a)	Transmit PDO Communication Parm 0.....	27
b)	Set periodic state transmission	28
	42.Object 1A00h Transmit PDO Mapping Parameter	28
	43.Object 2200h: Serial number string	29
	44.Set CAN protocol	29
b.	Revision History.....	31

1. How to connect Deutsch 4 pin:



PIN	COLOUR	FUNCTION
1	Blue	CAN L
2	White	CAN H
3	Black	Negative battery
4	Red	Vbatt. (12-24V)

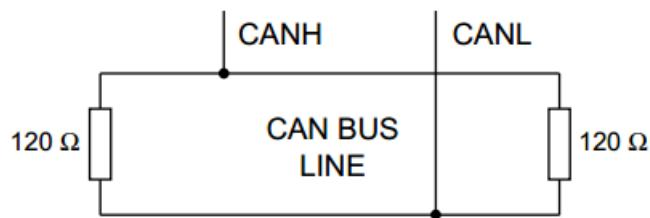


Each end of the CAN bus is terminated with 120Ω resistors in compliance with the standard to minimize signal reflections on the bus. You may need to place a 120Ω resistor between CAN-L and CAN-H.

2. Reference

Front view.

PKP-2600-SI

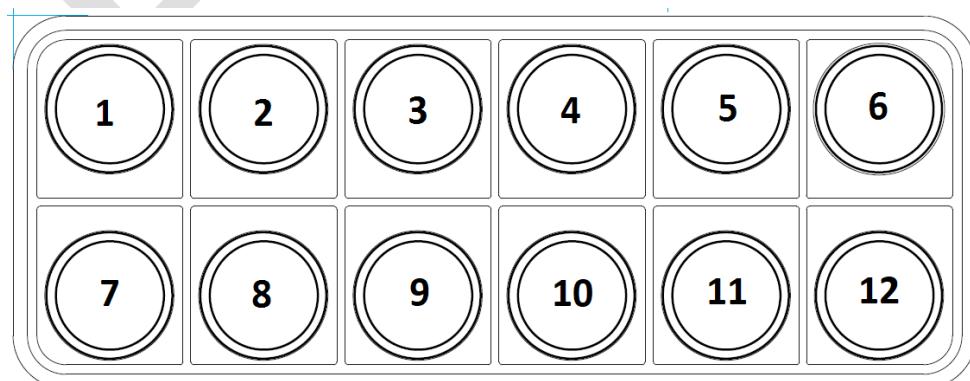

3. Default settings

Setting	Default state or level	How to change
Baud Rate	125 kbit/s	Object 2010h
CANopen Node ID	15h	Object 2013h
Device active on startup	Not active	Object 2012h
Key Brightness	3Fh (Maximum Brightness)	Object 2003h
Backlight Brightness	00h (OFF)	Object 2003h
Backlight Color	Amber	Object 2003h
Startup LED Light Show	Complete LED Sequence	Object 2014h
Periodic State Transmission	Disable	Object 1800h
DEMO mode	Disable	Object 2100h
Heartbeat Message	Disable	Object 1017h
Boot-up service	Active	Object 2011h

NMT MESSAGES

The Network Management messages follow a master-slave structure. Through NMT services, CANopen devices are initialized, started, reset or stopped.

NMT messages have CAN-ID always equal to 00h.

4. Start CANopen node (keypad activation message)

Identifier	00h	
Byte 0	01h	Start CANopen node
Byte 1	XXh	Keypad CAN ID 00h: start all the keypads 15h: start the keypad with CAN ID = 15h.
Byte 2, 7	00h	Not used

Example:

Direction	Identifier	Format	Message
To Keypad	0	Std	01 15

5. Enter pre-operational

Identifier	00h	
Byte 0	80h	Enter pre-operational
Byte 1	XXh	Keypad CAN ID 00h: enter all the keypads 15h: enter the keypad with CAN ID = 15h.
Byte 2, 7	00h	Not used

Example:

Direction	Identifier	Format	Message

To Keypad	0	Std	80 15
-----------	---	-----	-------

6. Reset CANopen node

Identifier	00h	
Byte 0	81h	Reset CANopen node
Byte 1	XXh	Keypad CAN ID 00h: reset all the keypads 15h: reset the keypad with CAN ID = 15h.
Byte 2, 7	00h	Not used

Example:

Direction	Identifier	Format	Message
To Keypad	0	Std	81 15

7. Stop CANopen node

Identifier	00h	
Byte 0	XXh	02h: Stop CANopen node 00h: Stop CANopen node (old PKP sw compatibility)
Byte 1	YYh	Keypad CAN ID 00h: stop all the keypads 15h: stop the keypad with CAN ID = 15h.
Byte 2, 7	00h	Not used

Example:

Direction	Identifier	Format	Message
To Keypad	0	Std	02 15

8. Boot-up service

This service is used to signal that a NMT slave has entered the NMT state Pre-operational.

Identifier	700h + current CAN ID	Default 715h
Byte 0	00h	One data byte is transmitted with value 0.

Example:

Direction	Identifier	Format	Message
From Keypad	715h	Std	00h

The keypad with CAN ID 15h has entered the NMT state Pre-operational.

9. Heartbeat message

The heartbeat mechanism for a CANopen device is established by cyclically transmitting the heartbeat message by the heartbeat producer.

Refer to [Object 1017h](#) for more details.

PDO messages

PDO (Process Data Object) are fast telegram messages that can simply manage most important functions. There are no answers for this kind of messages. Each PDO message has an equivalent Service Data Object message.

10. Keys state message

The keypad must be activated, see NMT Start CANopen Node message.

- PKP-2600-SI

Identifier	180 + current CAN ID	Default 195h
Byte 0	Keys from #1 to #8 K8 K7 K6 K5 – K4 K3 K2 K1	Keys: 1=pressed; 0=released
Byte 1	Keys from #9 to #12 0 0 0 0 – K12 K11 K10 K9	Keys: 1=pressed; 0=released
Byte 2,3	00h	Not used
Byte 4	XXh	Tick Timer

Examples:

Direction	Identifier	Format	Message	Key state
From Keypad	195	Std	00 00 00 00 XX	No key pressed
From Keypad	195	Std	08 00 00 00 XX	Only key #4 pressed
From Keypad	195	Std	80 00 00 00 XX	Only key #8 pressed
From Keypad	195	Std	21 00 00 00 XX	Keys #6 and #1 pressed
From Keypad	195	Std	00 08 00 00 XX	Only key #12 pressed

11. Set LED ON message

The keypad must be activated, see NMT Start CANopen Node message.

- PKP-2600-SI

Identifier	200 + current CAN ID	Default 215h
Byte 0	R8 R7 R6 R5 – R4 R3 R2 R1	Red LED
Byte 1	G4 G3 G2 G1 – R12 R11 R10 R9	Green and Red LED
Byte 2	G12 G11 G10 G9 – G8 G7 G6 G5	Green LED
Byte 3	B8 B7 B6 B5 B4 – B3 B2 B1	Blue LED
Byte 4	00 00 00 00 00 – B12 B11 B10 B9	Blue LED
Byte 5,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	LED
To Keypad	215	Std	00 00 00 00 00 00 00 00 00	Turn OFF all the LED
To Keypad	215	Std	01 00 00 00 00 00 00 00 00	Only red LED #1 ON
To Keypad	215	Std	42 00 00 00 00 00 00 00 00	Red LED #2 and #7 ON, other LED OFF
To Keypad	215	Std	00 00 01 00 00 00 00 00 00	Green LED #5 on, other LED off
To Keypad	215	Std	00 11 00 00 00 00 00 00 00	Green LED #1 and red LED #9 on, other LED off
To Keypad	215	Std	00 00 00 88 00 00 00 00 00	Blue LED #4 and #8 on, other LED off
To Keypad	215	Std	00 CC 00 00 00 00 00 00 00	Red LED #11, #12 on; green LED #3, #4 on; other LED off

12. Set LED Blink message

The keypad must be activated, see NMT Start CANopen Node message.

Note: if the blink message is sent when the LED is already ON, the LED blinks in alternative mode.

- PKP-2600-SI

Identifier	300 + current CAN ID	Default 315h
Byte 0	R8 R7 R6 R5 – R4 R3 R2 R1	Red LED
Byte 1	G4 G3 G2 G1 – R12 R11 R10 R9	Green and red LED
Byte 2	G12 G11 G10 G9 – G8 G7 G6 G5	Green LED
Byte 3	B8 B7 B6 B5 – B4 B3 B2 B1	Blue LED
Byte 4	00 00 00 00 – B12 B11 B10 B9	Blue LED
Byte 5,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	LED
To Keypad	315	Std	00 00 00 00 00 00 00 00 00	Turn OFF all the LED
To Keypad	315	Std	01 00 00 00 00 00 00 00 00	Only red LED #1 blinks
To Keypad	315	Std	09 00 00 00 00 00 00 00 00	Red LED #1 and #4 blink
To Keypad	315	Std	00 00 11 00 00 00 00 00 00	Green LED #5 and #9 blink
To Keypad	315	Std	00 00 00 01 00 00 00 00 00	Only blue LED #1 blinks
To Keypad	315	Std	00 00 CC 00 03 00 00 00 00	Green LED #7, #8, #11, #12 and blue LED #9, #10
To Keypad	215	Std	03 00 00 00 00 00 00 00 00	LED #1 and 2 blink red
To Keypad	315	Std	03 03 00 00 00 00 00 00 00	and green in alternate mode

13. Indicator LEDs brightness level

The keypad must be activated, see NMT Start CANopen Node message.

Identifier	400 + current CAN ID	Default 415h
Byte 0	XXh	Intensity 00h-3Fh → min-100%
Byte 2, 7	00h	Not used

Examples:

Direction	Identifier	Format	Message	LED
To Keypad	415	Std	08 00 00 00 00 00 00 00 00	Brightness = 12,5%
To Keypad	415	Std	10 00 00 00 00 00 00 00 00	Brightness = 25%

14.Backlight brightness level

The keypad must be activated, see NMT Start CANopen Node message.

Identifier	500 + current CAN ID	Default 515h
Byte 0	XXh	Intensity 00h-3Fh → 0-100%
Byte 2, 7	00h	Not used

Examples:

Direction	Identifier	Format	Message	LED
To Keypad	515	Std	00 00 00 00 00 00 00 00	Turn off the backlight
To Keypad	515	Std	10 00 00 00 00 00 00 00	Backlight brightness = 25%

SDO Messages:

A SDO (Service Data Object) is providing direct access to object entries of a CANopen device's object dictionary.

15.Object 2000h: Digital input module, keys states

This module contains all the Switch State information.

A one indicates the switch is pressed, a zero indicates the switch is released.

- PKP-2600-SI

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
Byte 1	00h	CAN Object 2000h
Byte 2	20h	
Byte 3	01h	Sub index
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 00 20 01 00 00 00 00	
Keypad reply	595	std	4B 00 20 01 00 00 00 00	No key pressed
			4B 00 20 01 01 00 00 00	Key 1 pressed
			4B 00 20 01 02 00 00 00	Key 2 pressed
			4B 00 20 01 04 00 00 00	Key 3 pressed
			4B 00 20 01 08 00 00 00	Key 4 pressed
			4B 00 20 01 10 00 00 00	Key 5 pressed
			4B 00 20 01 20 00 00 00	Key 6 pressed
			4B 00 20 01 40 00 00 00	Key 7 pressed
			4B 00 20 01 80 00 00 00	Key 8 pressed
			4B 00 20 01 03 00 00 00	Key 1 and 2 pressed
			4B 00 20 01 00 02 00 00	Key 10 pressed
			4B 00 20 01 FF 0F 00 00	All keys pressed

16.Object 2001h: Digital output module.

This module sets and reads the LED Outputs States. Each bit position represents the corresponding LED. A one indicates the LED is ON a zero indicates the LED is OFF

a) Set LED ON

- PKP-2600-SI

Identifier	600h + current CAN ID	Default 615h
Byte 0	2Bh	Set Device Register
Byte 1	01h	CAN Object 2001h
Byte 2	20h	
Byte 3	XXh	XX: Sub index 01h: Red Led 02h: Green Led 03h: Blue Led
Byte 4	YYh	L8 L7 L6 L5 L4 L3 L2 L1 LED position
Byte 5	ZZh	00 00 00 00 L12 L11 L10 L9 LED position
Byte 6,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2B 01 20 01 04 00 00 00	Set red LED #3 ON
Keypad Reply	595	Std	60 01 20 01 00 00 00 00	
To Keypad	615	Std	2B 01 20 03 20 00 00 00	Set blue LED #6 ON
Keypad Reply	595	Std	60 01 20 03 00 00 00 00	

b) Read LED ON

The LED have the same mapping of Set LED ON message

- PKP-2600-SI

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
Byte 1	01h	CAN Object 2001h
Byte 2	20h	
Byte 3	XXh	XX: Sub index 01h: Red Led 02h: Green Led 03h: Blue Led
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 01 20 01 00 00 00 00	Read red LED
Keypad Reply	595	Std	4B 01 20 01 08 00 00 00	Only red LED #4 ON
To Keypad	615	Std	40 01 20 02 00 00 00 00	Read green LED
Keypad Reply	595	Std	4B 01 20 02 00 01 00 00	Only green LED #9 ON
To Keypad	615	Std	40 01 20 03 00 00 00 00	Read blue LED
Keypad Reply	595	Std	4B 01 20 03 00 08 00 00	Only blue LED #12 ON

17.Object 2002h: Digital output module.

This module sets and reads the LED Blink States. Each bit position represents the corresponding LED. A one indicates the LED is blinking a zero indicates the LED is not blinking. If the blink message is sent when the LED is already ON, the LED blinks in alternative mode.

a) Set LED blink

• PKP-2600-SI

Identifier	600h + current CAN ID	Default 615h
Byte 0	2Bh	Set Device Register
Byte 1	02h	CAN Object 2002h
Byte 2	20h	
Byte 3	XXh	XX: Sub index 01h: Red Led 02h: Green Led 03h: Blue Led
Byte 4	YYh	L8 L7 L6 L5 L4 L3 L2 L1 LED position
Byte 5	ZZh	00 00 00 00 L12 L11 L10 L9 LED position
Byte 6,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2B 02 20 01 04 00 00 00	Set red LED #3 blink
Keypad Reply	595	Std	60 02 20 01 00 00 00 00	
To Keypad	615	Std	2B 02 20 03 00 02 00 00	Set blue LED #10 blink
Keypad Reply	595	Std	60 02 20 03 00 00 00 00	

b) Read LED blink

- **PKP-2600-SI**

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
Byte 1	02h	CAN Object 2002h
Byte 2	20h	
Byte 3	XXh	XX: Sub index 01h: Red Led 02h: Green Led 03h: Blue Led
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 02 20 01 00 00 00 00	Read red LED blink
Keypad Reply	595	Std	4B 02 20 01 FF OF 00 00	All red LED blink
To Keypad	615	Std	40 02 20 02 00 00 00 00	Read green LED blink
Keypad Reply	595	Std	4B 02 20 02 01 00 00 00	Only green LED #1 blinks
To Keypad	615	Std	40 02 20 03 00 00 00 00	Read blue LED blink
Keypad Reply	595	Std	4B 02 20 03 00 08 00 00	Blue LED #12 blinks

18.Object 2003h: Brightness Level

a) Set Indicator LED brightness level

Identifier	615h (600h + current CAN ID)	
Byte 0	2Fh	Set Device Register
Byte 1	03h	CAN Object 2003h
Byte 2	20h	
Byte 3	01h	Sub index
Byte 4	YYh	Intensity 00h-3Fh → min-100%
Byte 5,7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 03 20 01 20 00 00 00	Brightness = 50%
Keypad Reply	595	Std	60 03 20 01 00 00 00 00	

b) Backlight brightness level

Identifier	615h (600h + current CAN ID)	
Byte 0	2Fh	Set Device Register
Byte 1	03h	CAN Object 2003h
Byte 2	20h	
Byte 3	02h	Sub index
Byte 4	XXh	Intensity 00h-3Fh → 0-100%
Byte 5,7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 03 20 02 10 00 00 00	Brightness = 25%
Keypad Reply	595	Std	60 03 20 02 00 00 00 00	

c) Backlight color

Identifier	615h (600h + current CAN ID)			
Byte 0	2Fh			Set Device Register
Byte 1	03h			CAN Object 2003h
Byte 2	20h			
Byte 3	03h			Sub index
Byte 4	XXh			Color 01h: red 02h: green 03h: blue 04h: yellow 05h: cyan 06h: violet 07h: white/light blue 08h: amber/orange 09h: yellow/green
Byte 5,7	00h			Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 03 20 03 01 00 00 00	Red Backlight color
Keypad Reply	595	Std	60 03 20 03 00 00 00 00	

d) Set default backlight color

Identifier	615h (600h + current CAN ID)			
Byte 0	2Fh			Set Device Register
Byte 1	03h			CAN Object 2003h
Byte 2	20h			
Byte 3	04h			Sub index
Byte 4	XXh			Color 01h: red 02h: green 03h: blue 04h: yellow 05h: cyan 06h: violet 07h: white/light blue 08h: amber/orange 09h: yellow/green
Byte 5,7	00h			Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 03 20 04 03 00 00 00	Blue Backlight color
Keypad Reply	595	Std	60 03 20 04 00 00 00 00	

e) Set startup Indicator LED brightness level

Identifier	615h (600h + current CAN ID)		
Byte 0	2Fh		Set Device Register
Byte 1	03h		CAN Object 2003h
Byte 2	20h		
Byte 3	05h		Sub index
Byte 4	XXh		Intensity 00h-3Fh → min-100%
Byte 5,7	00h		Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 03 20 05 3F 00 00 00	Brightness = 100%
Keypad Reply	595	Std	60 03 20 05 00 00 00 00	

f) Set startup backlight brightness level

Identifier	615h (600h + current CAN ID)		
Byte 0	2Fh		Set Device Register
Byte 1	03h		CAN Object 2003h
Byte 2	20h		
Byte 3	06h		Sub index
Byte 4	XXh		Intensity 00h-3Fh → 0-100%
Byte 5,7	00h		Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 03 20 06 10 00 00 00	Brightness = 25%
Keypad Reply	595	Std	60 03 20 06 00 00 00 00	

19.Object 2010h: Baud rate setting

Identifier	615h (600h + current CAN ID)		
Byte 0	2Fh		Set Device Register
Byte 1	10h		CAN Object 2010h
Byte 2	20h		
Byte 3	00h		Sub index
Byte 4	00h		1000k
	01h		Reserved (force to 125k)
	02h		500k
	03h		250K
	04h		125k (Default)
	05h		Reserved (force to 125k)
	06h		50k
	07h		20k
Byte 5,7	00h		Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 10 20 00 03 00 00 00	Baud rate = 250k
Keypad Reply	595	Std	60 10 20 00 00 00 00 00	

20.Object 2011h: Set Boot-up service

Object 2011h message enable or disable the boot up message sent by the keypad at power up to the CAN network.

Identifier	600h + current CAN ID			Default 615h
Byte 0	2Fh			Set Device Register
Byte 1	11h			CAN Object 2011h
Byte 2	20h			
Byte 3	00h			Sub index
Byte 4	XXh			00h: Not active 01h: Active
Byte 5,7	00h			Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 11 20 00 00 00 00 00	Boot-up service not active
Keypad Reply	595	Std	60 11 20 00 00 00 00 00	

21.Object 2012h: Set device active on startup

If keypad is active on startup don't need the Start CANopen command from host.

Identifier	600h + current CAN ID			Default 615h
Byte 0	2Fh			Set Device Register
Byte 1	12h			CAN Object 2012h
Byte 2	20h			
Byte 3	00h			Sub index
Byte 4	XXh			00h: Not active 01h: Active
Byte 5,7	00h			Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 12 20 00 01 00 00 00	Device active on startup
Keypad Reply	595	Std	60 12 20 00 00 00 00 00	

22.Object 2013h: Set CANopen node ID

Identifier	600h + current CAN ID			Default 615h
Byte 0	2Fh			Set Device Register
Byte 1	13h			CAN Object 2013h
Byte 2	20h			
Byte 3	00h			Sub index
Byte 4	XXh			XX: New node id (00h-7Fh), default 15h
Byte 5,7	00h			Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 13 20 00 18 00 00 00	New CANopen node ID 18h
Keypad Reply	595	Std	60 13 20 00 00 00 00 00	

DRAFT

23.Object 2014h: Set startup LED show

Identifier	600h + current CAN ID	Default 615h
Byte 0	2Fh	Set Device Register
Byte 1	14h	CAN Object 2014h
Byte 2	20h	
Byte 3	00h	Sub index
		00h: Disable
Byte 4	XXh	01h: Complete LED Show (default)
		02h: Fast Flash
Byte 5,7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 14 20 00 00 00 00 00	Disable startup LED show
Keypad Reply	595	Std	60 14 20 00 00 00 00 00	

24.Object 2100h: Set DEMO mode

This message enables the Demo mode function. Demo mode is a special feature that consists in different LED states for each button pressing. Refer to the appendix “Demo mode instructions” to try these special features. Disconnect and reconnect the keypad after the enable message to enter this mode. To exit the Demo mode, send the Disable Demo mode command or another command message.

Identifier	600h + current CAN ID	Default 615h
Byte 0	2Fh	Set Device Register
Byte 1	00h	CAN Object 2100
Byte 2	21h	
Byte 3	00h	Sub index
Byte 4	XXh	00h: Not active 01h: Active
Byte 5,7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2F 00 21 00 01 00 00 00	Set DEMO mode Active
Keypad Reply	595	Std	60 00 21 00 00 00 00 00	

25.Object 1017h: Producer heartbeat time

The producer heartbeat time shall indicate the configured cycle time of the heartbeat.

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
	2Bh	Set device register
Byte 1	17h	CAN Object 1017h
Byte 2	10h	
Byte 3	00h	Sub index
Byte 4	YYh	YYh: Heartbeat time in milliseconds LSByte
Byte 5	XXh	XXh: Heartbeat time in milliseconds MSByte
Byte 6,7	00h	Not used

Heartbeat time: XXYYh (from 0A00h to FFFEh: 10ms to 65534 milliseconds).

Examples:

Direction	Identifier	Form	Message	Data
To Keypad	615	Std	40 17 10 00 00 00 00 00 00	Read heartbeat time
Keypad Reply	595	Std	4B 17 10 00 64 00 00 00	Heartbeat time = 100ms
To Keypad	615	Std	2B 17 10 00 00 00 00 00 00	Switch off the heartbeat
Keypad Reply	595	Std	60 17 10 00 00 00 00 00	
To Keypad	615	Std	2B 17 10 00 32 00 00 00	Set heartbeat time = 50ms
Keypad Reply	595	Std	60 17 10 00 00 00 00	
To Keypad	615	Std	2B 17 10 00 F4 01 00 00	Set heartbeat time = 500ms
Keypad Reply	595	Std	60 17 10 00 00 00 00	

Heartbeat message

The heartbeat mechanism for a CANopen device is established by cyclically transmitting the heartbeat message by the heartbeat producer. One or more CANopen devices in the network are aware of this heartbeat message. If the heartbeat cycle fails for the heartbeat producer the local application on the heartbeat consumer will be informed about that event.

If a CANopen device starts with a value for the heartbeat producer time unequal to 0, the boot-up message is regarded as first heartbeat message.

Identifier	700h + current CAN ID	Default 715h
Byte 0	XXh	XXh: State of heartbeat producer 00h: Boot-up 04h: Stop 05h: Operational 7Fh: Pre-operational

Example:

Direction	Identifier	Format	Message	Data
From Keypad	715h	Std	00h	Boot up
From Keypad	715h	Std	7Fh	Pre-operational
To keypad	00h	Std	01h 15h	Start keypad with CAN ID 15h
From Keypad	715h	Std	05h	Operational

26.Object 1000h: Device Type

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
Byte 1	00h	CAN Object 1000h
Byte 2	10h	
Byte 3, 7	00h	Not used

Example:

Direction	Identifier	Format	Data
To Keypad	615	Std	40 00 10 00 00 00 00 00 00
Keypad Reply	595	Std	43 00 10 00 91 01 0B 00

Device profile number 0xB0191h.

27.Object 1001h: Error Register

This object is not yet implemented in the device.

28.Object 1008h: Manufacturer Device Name

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
Byte 1	08h	CAN Object 1008h
Byte 2	10h	
Byte 3, 7	00h	Not used

1° additional byte

Identifier	600h + current CAN ID	Default 615h
Byte 0	60h	Read Device Register Next Byte
Byte 1, 7	00h	Not used

2° additional byte

Identifier	600h + current CAN ID	Default 615h
Byte 0	70h	Read Device Register Next Byte
Byte 1, 7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 08 10 00 00 00 00 00	
Keypad Reply	595	Std	41 08 10 00 0B 00 00 00	
To Keypad	615	Std	60 00 00 00 00 00 00 00	
Keypad Reply	595	Std	00 42 6C 69 6E 6B 4D 61	BlinkMa
To Keypad	615	Std	70 00 00 00 00 00 00 00	
Keypad Reply	595	Std	17 72 69 6E 65 00 00 00	rine

Manufacturer Device Name: BlinkMarine

The first byte of the last data message replied is 17h.

29.Object 1009h: Manufacturer Hardware Revision

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
Byte 1	09h	CAN Object 1009h
Byte 2	10h	
Byte 3, 7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 09 10 00 00 00 00 00	
Keypad Reply	595	Std	43 09 10 00 31 30 5F 56	V_01

Manufacturer Hardware Revision: V_01

30.Object 100Ah: Manufacturer Firmware Revision

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
Byte 1	0Ah	CAN Object 100Ah
Byte 2	10h	
Byte 3, 7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 0A 10 00 00 00 00 00	
Keypad Reply	595	Std	43 0A 10 00 32 2E 32 56	V2.2

Manufacturer Firmware Revision: V2.2

31.Object 100Bh: Model ID

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
Byte 1	0Bh	CAN Object 100Bh
Byte 2	10h	
Byte 3, 7	00h	Not used

1° additional byte

Identifier	600h + current CAN ID	Default 615h
Byte 0	60h	Read Device Register second byte
Byte 1, 7	00h	Not used

2° additional byte

Identifier	600h + current CAN ID	Default 615h
Byte 0	70h	Read Device Register third byte
Byte 1, 7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 0B 10 00 00 00 00 00 00 00	
Keypad Reply	595	Std	41 0B 10 00 09 00 00 00	
To Keypad	615	Std	60 00 00 00 00 00 00 00 00	
Keypad Reply	595	Std	00 50 4B 50 32 36 30 30	PKP2600
To Keypad	615	Std	70 00 00 00 00 00 00 00 00	
Keypad Reply	595	Std	1B 53 49 00 00 00 00 00 00	SI

Model ID: PKP2600SI

The first byte of the last data message replied is 1Bh.

32.Object 1018h: Identity Data

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	18h	CAN Object 1018h
Byte 2	10h	
	00h	Number of mapped objects
Byte 3	01h	Vendor Id
	04h	Serial number
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 18 10 00 00 00 00 00	
Keypad Reply	595	Std	4F 18 10 00 04 00 00 00	4
To Keypad	615	Std	40 18 10 01 00 00 00 00	
Keypad Reply	595	Std	43 18 10 01 E2 03 00 00	000003E2h

Blink Marine Vendor Id: 000003E2h

33.Object 1400h: Receive PDO Communication Parm 0

Describes the Receive Parameters for the LED states PDO Message.

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	00h	CAN Object 1400h
Byte 2	14h	
	00h	Number of mapped objects
Byte 3	01h	COB Id
	02h	Transmission Type
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 00 14 00 00 00 00 00	
Keypad Reply	595	Std	4F 00 14 00 02 00 00 00	2
To Keypad	615	Std	40 00 14 01 00 00 00 00	
Keypad Reply	595	Std	43 00 14 01 15 02 00 00	0000 0215h
To Keypad	615	Std	40 00 14 02 00 00 00 00	
Keypad Reply	595	Std	4F 00 14 02 FE 00 00 00	FEh

Receive PDO communication Parm 0:

- Number of mapped objects: 2;
- COB id: 0000 0200h + NODE ID;
- Transmission Type: FEh.

34.Object 1401h: Receive PDO communication Parm 1

Describes the Receive Parameters for the LED blink states PDO Message.

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	01h	CAN Object 1401h
Byte 2	14h	
	00h	Number of mapped objects
Byte 3	01h	COB Id
	02h	Transmission Type
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 01 14 00 00 00 00 00 00 00	
Keypad Reply	595	Std	4F 01 14 00 02 00 00 00 00	2
To Keypad	615	Std	40 01 14 01 00 00 00 00 00 00	
Keypad Reply	595	Std	43 01 14 01 15 03 00 00 00 00	0000 0315h
To Keypad	615	Std	40 01 14 02 00 00 00 00 00 00	
Keypad Reply	595	Std	4F 01 14 02 FE 00 00 00 00 00	FEh

Receive PDO communication Parm 1:

- Number of mapped objects: 2;
- COB id: 0000 0300h + NODE ID;
- Transmission Type: FEh.

35.Object 1402h: Receive PDO communication Parm 2

Describes the Receive Parameters for Indicator LED brightness

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	02h	CAN Object 1402h
Byte 2	14h	
	00h	Highest sub-index supported
Byte 3	01h	COB Id
	02h	Transmission Type
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 02 14 00 00 00 00 00 00 00	
Keypad Reply	595	Std	4F 02 14 00 02 00 00 00 00	2
To Keypad	615	Std	40 02 14 01 00 00 00 00 00 00	
Keypad Reply	595	Std	43 02 14 01 15 04 00 00 00 00	00000 0415h
To Keypad	615	Std	40 02 14 02 00 00 00 00 00 00	
Keypad Reply	595	Std	4F 02 14 02 FE 00 00 00 00 00	FEh

Receive PDO communication Parm 2:

- a. Number of mapped objects: 2;
- b. COB id: 400h + NODE ID;
- c. Transmission Type: FEh.

d.
36.Object 1403h: Receive PDO communication Parm 3

Describes the Receive Parameters for backlight LED brightness

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	03h	CAN Object 1403h
Byte 2	14h	
Byte 3	00h 01h 02h	Highest sub-index supported COB Id Transmission Type
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 03 14 00 00 00 00 00 00 00	
Keypad Reply	595	Std	4F 03 14 00 02 00 00 00	2
To Keypad	615	Std	40 03 14 01 00 00 00 00 00 00	
Keypad Reply	595	Std	43 03 14 01 15 05 00 00	00000 0515h
To Keypad	615	Std	40 03 14 02 00 00 00 00 00	
Keypad Reply	595	Std	4F 03 14 02 FE 00 00 00	FEh

Receive PDO communication Parm 3:

- a. Number of mapped objects: 2;
- b. COB id: 500h + NODE ID;
- c. Transmission Type: FEh.

37.Object 1600h: Receive PDO mapping Parameter 0

Describes the mapping of LED state PDO Message.

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	00h	CAN Object 1600h
Byte 2	16h	
Byte 3	00h 01h 02h 03h	Number of mapped objects PDO Mapping Entry 1 PDO Mapping Entry 2 PDO Mapping Entry 3
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 00 16 00 00 00 00 00 00 00	
Keypad Reply	595	Std	4F 00 16 00 03 00 00 00	3
To Keypad	615	Std	40 00 16 01 00 00 00 00	
Keypad Reply	595	Std	43 00 16 01 08 01 01 20	2001 01 08
To Keypad	615	Std	40 00 16 02 00 00 00 00	
Keypad Reply	595	Std	43 00 16 02 08 02 01 20	2001 02 08
To Keypad	615	Std	40 00 16 03 00 00 00	
Keypad Reply	595	Std	43 00 16 03 08 03 01 20	2001 03 08

Receive PDO mapping Parameter 0:

- Number of mapped objects: 3;
- Set LED red: Object 2001h, Sub index 01h, Length 08h;
- Set LED green: Object 2001h, Sub index 02h, Length 08h;

- Set LED blue: Object 2001h, Sub index 03h, Length 08h;

38.Object 1601h: Receive PDO mapping Parameter 1

Describes the mapping of LED blink state PDO Message.

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	01h	CAN Object 1601h
Byte 2	16h	
Byte 3	00h	Number of mapped objects
	01h	PDO Mapping Entry 1
	02h	PDO Mapping Entry 2
	03h	PDO Mapping Entry 3
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 01 16 00 00 00 00 00	
Keypad Reply	595	Std	4F 01 16 00 03 00 00 00	3
To Keypad	615	Std	40 01 16 01 00 00 00 00	
Keypad Reply	595	Std	43 01 16 01 08 01 02 20	2002 01 08
To Keypad	615	Std	40 01 16 02 00 00 00 00	
Keypad Reply	595	Std	43 01 16 02 08 02 02 20	2002 02 08
To Keypad	615	Std	40 01 16 03 00 00 00 00	
Keypad Reply	595	Std	43 01 16 03 08 03 02 20	2002 03 08

Receive PDO mapping Parameter 1:

- Number of mapped objects: 3;
- Set LED red blink: Object 2002h, Sub index 01h, Length 08h;
- Set LED green blink: Object 2002h, Sub index 02h, Length 08h;
- Set LED blue blink: Object 2002h, Sub index 03h, Length 08h;

39.Object 1602h: Receive PDO mapping Parameter 2

Describes the mapping of Indicator LED brightness PDO Message.

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	02h	CAN Object Object 1602h
Byte 2	16h	
Byte 3	00h	Number of mapped objects
	01h	PDO Mapping Entry 1
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 02 16 00 00 00 00 00	
Keypad Reply	595	Std	4F 02 16 00 01 00 00 00	1
To Keypad	615	Std	40 02 16 01 00 00 00 00	
Keypad Reply	595	Std	43 02 16 01 08 01 03 20	2003 01 08

Receive PDO mapping Parameter 2:

- Number of mapped objects: 1;
- Set LED red blink: Object 2003h, Sub index 01h, Length 08h;

40.Object 1603h: Receive PDO mapping Parameter 3

Describes the mapping of backlight brightness PDO Message.

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	03h	CAN Object 1601h
Byte 2	16h	
Byte 3	00h	Number of mapped objects
	01h	PDO Mapping Entry 1
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 03 16 00 00 00 00 00	
Keypad Reply	595	Std	4F 03 16 00 01 00 00 00	1
To Keypad	615	Std	40 03 16 01 00 00 00 00	
Keypad Reply	595	Std	43 03 16 01 08 02 03 20	2003 02 08

Receive PDO mapping Parameter 3:

- Number of mapped objects: 1;
- Set backlight brightness: Object 2003h, Sub index 02h, Length 08h

41.Object 1800h:

a) Transmit PDO Communication Parm 0

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	00h	CAN Object 1800h
Byte 2	18h	
	00h	Number of mapped objects
	01h	COB Id
Byte 3	02h	Transmission Type
	05h	Event Timer
Byte 4,7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 00 18 00 00 00 00 00	
Keypad Reply	595	Std	4F 00 18 00 05 00 00 00	5
To Keypad	615	Std	40 00 18 01 00 00 00 00	
Keypad Reply	595	Std	43 00 18 01 95 01 00 00	195h
To Keypad	615	Std	40 00 18 02 00 00 00 00	
Keypad Reply	595	Std	4F 00 18 02 FE 00 00 00	FEh
To Keypad	615	Std	40 00 18 05 00 00 00 00	
Keypad Reply	595	Std	4F 00 18 05 00 00 00 00	0 = OFF

Transmit PDO communication Parm 0:

- Number of mapped objects: 5;
- Address base: 195h= 180h+ NODE ID;

- Transmission Type: FEh;
- Event timer: XXYY in milliseconds, 0 = OFF.

b) Set periodic state transmission

Identifier	600h + current CAN ID	Default 615h
Byte 0	2Bh	Set device register
Byte 1	00h	CAN Object 1800h
Byte 2	18h	
Byte 3	05h	Sub index
Byte 4	YYh	YYh: Event timer period in milliseconds LSByte
Byte 5	XXh	XXh: Event timer period in milliseconds MSbyte
Byte 6, 7	00h	Not used

Event timer period: XXYYh (from 0A00h to FFFEh: 10ms to 65534 milliseconds).

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	2B 00 18 05 00 00 00 00	Switch off the periodic state transmission
Keypad Reply	595	Std	60 00 18 05 00 00 00 00	
To Keypad	615	Std	2B 00 18 05 32 00 00 00	Set period = 50ms
Keypad Reply	595	Std	60 00 18 05 00 00 00 00	
To Keypad	615	Std	2B 00 18 05 F4 01 00 00	Set period = 500ms
Keypad Reply	595	Std	60 0 18 05 00 00 00 00	

42.Object 1A00h Transmit PDO Mapping Parameter

Describes the mapping of Key state PDO Message.

Identifier	615h (600h + current CAN ID)	
Byte 0	40h	Read Device Register
Byte 1	00h	CAN Object 1A00h
Byte 2	1Ah	
Byte 3	00h	Number of mapped objects
	01h	PDO Mapping Entry 1
Byte 4,7	00h	Not used

Examples:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 00 1A 00 00 00 00 00	
Keypad Reply	595	Std	4F 00 1A 00 01 00 00 00	1
To Keypad	615	Std	40 00 1A 01 00 00 00 00	
Keypad Reply	595	Std	43 00 1A 01 10 01 00 20	2000 01 10

Transmit PDO Mapping Parameter:

- Number of mapped objects: 1;
- Switch state: Object 2000h, Sub index 01h, Length 10h;

43.Object 2200h: Serial number string

Identifier	600h + current CAN ID	Default 615h
Byte 0	40h	Read Device Register
Byte 1	00h	CAN Object 2200h
Byte 2	22h	
Byte 3,7	00h	Not used

1° additional byte

Identifier	600h + current CAN ID	Default 615h
Byte 0	60h	Read Device Register second byte
Byte 1, 7	00h	Not used

2° additional byte

Identifier	600h + current CAN ID	Default 615h
Byte 0	70h	Read Device Register third byte
Byte 1, 7	00h	Not used

Example:

Direction	Identifier	Format	Message	Data
To Keypad	615	Std	40 00 22 00 00 00 00 00	
Keypad Reply	595	Std	41 00 22 00 08 00 00 00	
To Keypad	615	Std	60 00 00 00 00 00 00 00	
Keypad Reply	595	Std	00 46 46 46 46 46 46 46	FFFFFF
To Keypad	615	Std	70 00 00 00 00 00 00 00	
Keypad Reply	595	Std	1D 46 00 00 00 00 00 00	F

Serial number: ascii FFFFFFFF

The first byte of the last data message replied is 1Dh.

44.Set CAN protocol

This set of messages are used to change to the desired CANbus protocol.

- Change from CANopen to J1939:

Direction	Identifier	Format	Message	Data
To keypad	615h	Std	2B FF 20 01 01	Change to J1939

- Change from J1939 to CANopen:

Direction	Identifier	Format	Message	Data

APPENDIX: DEMO Mode instructions

In DEMO Mode you can try the following functions by pressing buttons on the PKP2600SI.

Entering this mode, you turn on backlight red; for the key 1 each time you press the button you can change the color of backlight with this sequence:

1. Red;
2. Green;
3. Blue;
4. Yellow;
5. Cyan;
6. Magenta;
7. White/light blue;
8. Amber;
9. Yellow/green;
10. OFF.

For the key 4, each time that you press the button, there are different steps in this sequence:

1. Complete LED show of all colors;
2. Backlight active with keys on in sequence (it is possible to change the color of keys pressing button 1)
3. Alternate blinking of LED keys number 1-6 with red color; 2-7 with amber color; 3-8 with yellow; 4-9 with green color; 5-11 with cyan color and 6-12 with white/light blue color.

b. Revision History

Date	Manual Revision	Comment	Related SW version
11/12/2017	1.0	First Release	2.x
05/02/2018	1.1	Second Release <ul style="list-style-type: none">• Corrected range values in the objects 1017h and 1800h (b)• Corrected the parameter concerning backlight brightness• Corrected the message in the SET CAN protocol command• Replaced the image of old PKP2600 with the new PKP2600-SI	X.x